


au by KDDI

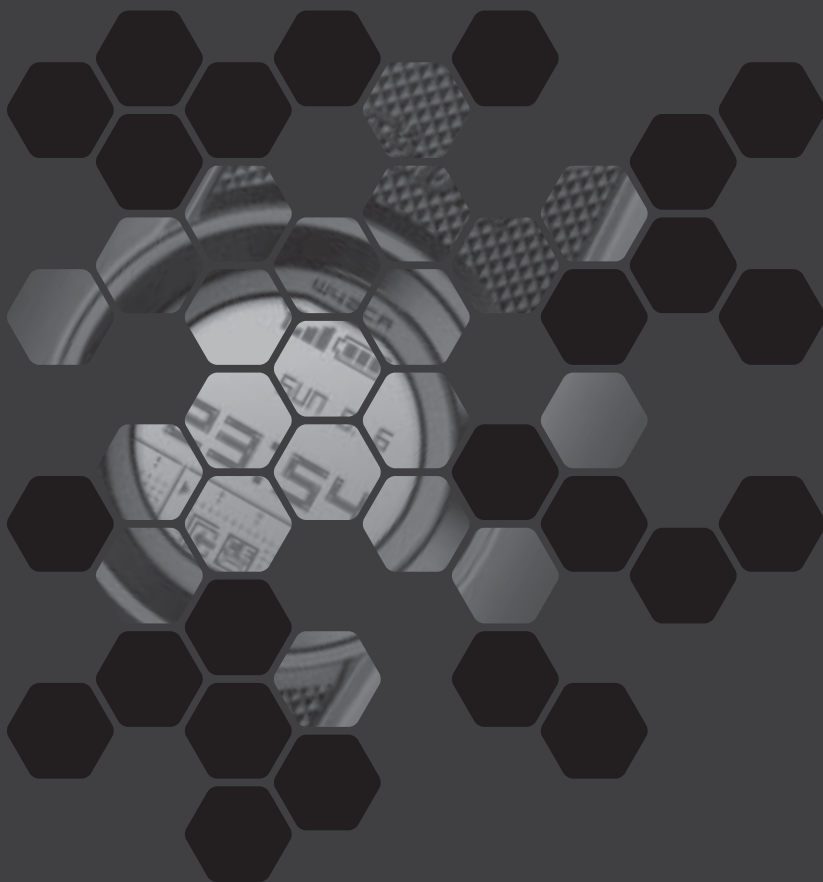

G'zOne W42CA

Basic Manual

CASIO

Contents/Ready

Phone Call

Inputting
Characters

Address Book/
Pair Function

Mail/
Hello Messenger

Camera

EZweb

EZ Navi

PC site viewer

Smart Mode/
Teens Mode

Other Functions

Troubleshooting/
Remote Auto Lock

Index

Introduction

Thank you for purchasing the G'zOne W42CA.

Before using it for the first time, be sure to read the G'zOne W42CA Basic Manual (this PDF manual) so as to know how to use it correctly. After you finish reading this manual, store it and the printed materials that come with the phone in a safe place for future reference.

Printed Manuals for the G'zOne W42CA (Japanese)

The G'zOne W42CA comes with a Basic Manual and an Instruction Manual.

For information about basic operation



G'zOne W42CA Basic Manual
Equivalent to this English PDF manual.

For detailed information about each function



G'zOne W42CA Instruction Manual
English version not available.

The following information is also available on the au website.

- To download the Basic Manual or Instruction Manual
(<http://au-pro.kddi.com/phone/torisetu/index.html>)
- To access a keyword searchable au online manual
(<http://www.au.kddi.com/manual/index.html>)

You can also access the au online manual using EZweb.

EZweb Access

EZトップメニュー(EZ Top Menu)

→料金・申込・インフォ(Charges, Applications, and Info)

→auオンラインマニュアル(au Online Manual)

Info

The typeface, fonts, and colors of the texts on the screens shown in this manual may differ from the actual contents. Also, certain icons and the scroll bars may be omitted.

Cellphone Etiquette

Mind your manners!

A cellphone always emits weak radio waves while it is turned on. Enjoy operation of your cellphone without forgetting to be considerate of those around you.

Some locations do not allow the use of cellphones.

- Using a cellphone while driving is both dangerous and prohibited by Japanese law.
- Using a cellphone inside of an aircraft is prohibited by law. Be sure to turn off your cellphone before takeoff.



Watch out where you use your cellphone, and keep your voice down.

- Do not make calls at cinemas, theaters, museums, libraries, or other similar locations. Turn off the cellphone or use Manner Mode to ensure that the ring tone does not disturb others.
- When in public, move to a location where you will not be blocking traffic.
- On the Shinkansen, in a hotel lobby, or in other similar locations, move to a location where you will not disturb others.
- Take care to avoid talking on the phone in a loud voice.
- Before taking the picture of others, be sure to obtain permissions first.



Cellphone radio waves may interfere with electrical medical equipment.

- On a train or in other crowded locations, there is always the possibility that someone nearby may be wearing a pacemaker. Turn off your cellphone when you are in a crowded area.
- Follow the rules of hospitals and other medical facilities concerning the use or possession of cellphones.



Cellphone Basics

Features

Camera

Shoot photos and record movies, and send them by e-mail.

▶ Page 59



PC site viewer

View WEB sites created for viewing on PCs.

▶ Page 78



EZ Navi

EZ Navi Walk, Position Search, and Area Message allow you to get various kinds of location information. They are all built-in functions.

▶ Page 74

Pair Function

Call or send mail to preset individuals quickly and easily.

▶ Page 43



Hello Messenger

Enjoy meeting with the members using our original cartoon-like characters.

▶ Page 55



Hot Key

Select either "Hot Dial" or "Hot Buzzer" as the Hot Key function.

▶ Page 96



Mail

Send mail messages to other cellphones or to PCs.

▶ Page 45



Electronic Compass

A built-in digital compass can be used to display direction and angle.

EZweb

Download "Chaku-Uta™", wallpaper, and other data.

▶ Page 66




Manner Mode and Easy Voice Memo

Manner Mode

Use Manner Mode to turn off the ring tone so as not to bother others around you




While the standby screen is displayed, hold down  for about one second.

▶ Page 31

Easy Voice Memo

If you cannot answer a call, Easy Voice Memo plays an answering message and records the caller's message.



While the standby screen is displayed, hold down  for about one second.


▶ Page 32

Checking Power, Signal Strength, and Battery Level

Normally leave the phone turned on.



The phone needs to be turned on to make and receive calls.

Hold down  for at least 1.5 seconds to turn on the phone.

▶ Page 14

You cannot talk on the phone if it is unable to receive a signal.



Signal strength is low in some areas, even if they are within the service area.

 indicates the current signal strength.

▶ Page 14

Keep an eye on the battery level.




The phone may not function properly if battery power is low.

 indicates the current battery level.


▶ Page 14

Never use your cellphone while driving!

Holding a cellphone in your hand, talking on a cellphone, or looking at a cellphone display to send mail or to perform any other operation while driving is prohibited by Japanese law.
(Revised Traffic Control Law, effective November 1, 2004)



× Reading mail or looking at the display.






× Holding a cellphone in your hand to talk.

Turn off your cellphone or use Drive Mode while driving.

Drive Mode

In Drive Mode, the phone will play the message “ただいま車を運転しています。…” (I am driving right now...), and then ask the caller to leave a message using Easy Voice Memo.

While the standby screen is displayed, press , and then press  (ON). Next, press  (Drive Mode) to enter Drive Mode.




Beware of spam and one-ring calls!

How to Combat Spam

You can set up mail filters to block specific mail or mail identified as “未承諾広告※” (unsolicited advertisement), which often includes spam.

Your cellphone has the following filters to block spam.


- ・ 未承諾広告フィルター
(unsolicited advertisement filter)
- ・ アドレスフィルター (address filters)
 - － 指定拒否設定 (blocks specific mail)
 - － 指定受信設定 (receives specific mail)



Page 52

Beware of one-ring calls!


A “one-ring call” (wan-giri in Japanese) rings your phone only once, in an attempt to make you call back to a service that automatically bills you very high charges.

The  icon at the head of an incoming record

indicates that the call

rang for only four seconds or less.

This indicates a possible “one-ring call.”



Page 27

Disaster Message Board Service

Disaster Message Board

The Disaster Message Board lets you use EZweb to register information about your well-being in case of a major disaster. The information you register can be accessed from anywhere in Japan over EZweb or the Internet.

Registering the safety information

- ◆ When a major disaster strikes, you can use your au cellphone to access the “災害用伝言板” (Disaster Message Board) on EZweb and register your current condition, comments, and other information about your well-being.
- ◆ After you register information, it can be sent by mail to family, friends, and other individuals you have registered as a recipient of your Disaster Message Board information.

Checking the safety information


- ◆ Disaster Message Board information can be accessed by inputting the phone number of an individual over EZweb or the Internet.*
 - ※ Disaster Message Board information can be accessed from another type of cellphone (except for TU-KA), PHS, or PC at <http://dengon.ezweb.ne.jp/>.

Access method

 ▶▶▶ Top Menu ▶▶▶ 災害用伝言板
(Disaster Message Board)

<http://dengon.ezweb.ne.jp/>



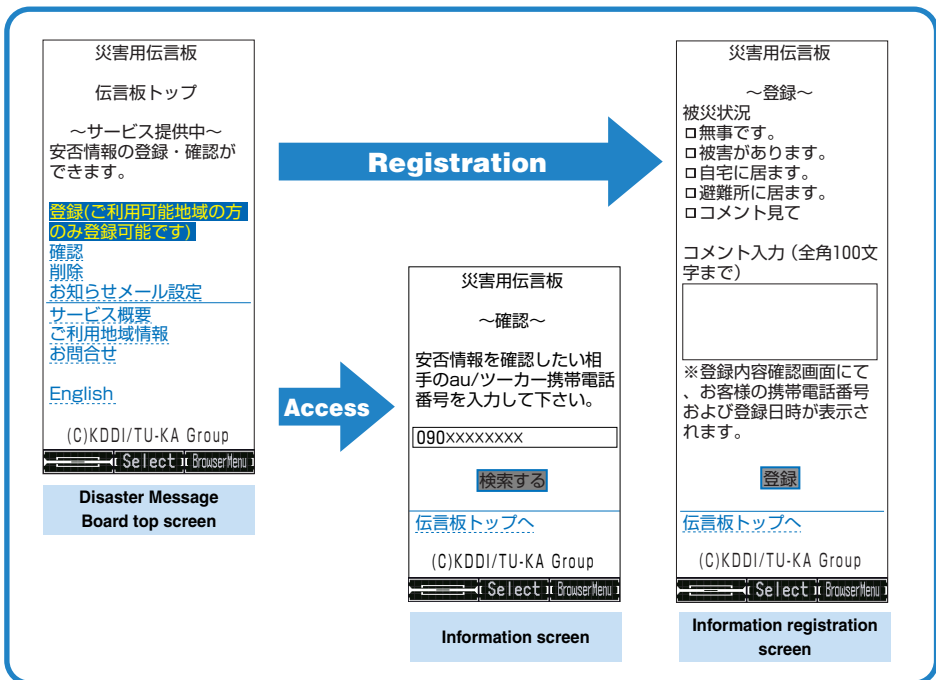

※ Registration contents are retained for up to 72 hours.

※ You can register up to 10 entries per phone number. Registering a new entry while there are already 10 registered entries, automatically overwrites the oldest entry.

※ You can view a Disaster Message Board demonstration at:

☐ → Top Menu → 料金・申込・インフォ → 災害用伝言板 (デモ版)
(Charges, Applications, and Info) (Disaster Message Board (Demo))

※ To view the Disaster Message Board in English, select the "English" option on the Disaster Message Board top screen.

Contents

Cellphone Etiquette	Mind your manners!	1
Cellphone Basics	Features	2
	Manner Mode and Easy Voice Memo	3
	Checking Power, Signal Strength, and Battery Level	3
	Never use your cellphone while driving!	4
	Beware of spam and one-ring calls!	5
	Disaster Message Board Service	6
Contents	8
Ready	Checking the Contents of the Package	10
	Names of Parts	11
	Charging the Battery Pack	12
	Turning On Power	14
	Initial Values	14
	Personal Identification Numbers and Passwords	15
	Selecting English as the Display Language	16
	Operation Basics	18
	Display Indicators	19
	Main Menu	20
	Initializing E-mail and EZweb	22
	Looking Up Your Current Phone Number and E-mail Address	23
	Changing Your E-mail Address	24
Phone Call	Making a Call	26
	Answering a Call	26
	Redialing(Outgoing Records/Incoming Records)	27
	One-ring Calls	27
	Changing the Ring Tone	28
	Adjusting the Ring Tone Volume	30
	Adjusting the Earpiece Volume during a Call	31
	Turning On Manner Mode	31
	Turning On Easy Voice Memo	32
	Playing an Easy Voice Memo	33
Inputting Characters	34
	Inputting an E-mail Address	35
	Inputting Pictographs and Useful Sentences	36
Address Book	Registering an Address Book	38
	Editing an Address Book Record	40
	Adding Outgoing or Incoming Record Data to the Address Book ...	41
	Dialing from the Address Book	42
Pair Function	Registering a Pair Partner	43
	Making a Phone Call, Sending Mail, Invite a Pair Partner to a Hello Messenger Meeting	44
Mail	Using E-mail	45
	Using C-mail	46
	Creating and Sending E-mail Messages	47
	Reading Received E-mail Messages	49
	Reading an E-mail Message with an Attached Photo or Movie	50
	Replying to a Received E-mail Message	51
	Avoiding Spam	52
	Creating and Sending C-mail Messages	53
	Reading Received C-mail Messages	54

Hello Messenger	55
Displays the Hello Messenger Menu	56
Invite the Members to the Meeting	57
When You Get an Invitation Message to Join	58
Camera Features	59
Camera	
Shooting a Photo	61
Recording a Movie	62
Viewing Photos and Movies	64
Attaching a Photo or Movie to an E-mail Message	65
Using Photo Mail	65
EZweb	
Using EZweb	66
Displaying the EZ Top Menu	67
Bookmarking Sites You Frequently Access	68
Viewing a Bookmarked Site	69
Downloading Chaku-Uta®	70
Downloading Chaku-Uta-Full®	71
Checking Charges	72
EZ Channel	73
EZ Navi Features	74
Security Navi Features	76
PC site viewer Features	78
PC site viewer	
Mastering Operation Basics	79
Using Standby Assignment	80
Smart Mode	
Entering Smart Mode	82
Exiting Smart Mode	83
Using the Smart Mode Main Menu	84
Adding Data to the Address Book in Smart Mode	85
Using the Address Book in Smart Mode	87
Creating and Sending E-mail Messages in Smart Mode	88
Shooting a Photo in Smart Mode	91
Viewing Photos in Smart Mode	92
Teens Mode	
Using Teens Mode	94
Turning on Teens Mode	95
Other Functions	
Hot Key Features	96
Extension Mode	97
Troubleshooting	99
If you lose your G'zOne W42CA	100
Index	102

Ready


Before using the G'zOne W42CA, check the contents of the package comes with your G'zOne W42CA.

You should also familiarize yourself with basic operations, like how to charge the battery, how to turn the power on, etc.



Checking the Contents of the Package


● G'zOne W42CA

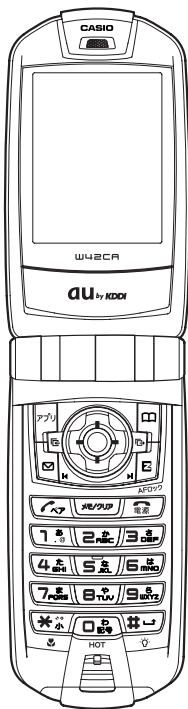


● Battery pack (42CAUAA)



● Desktop holder (42CAPUA)



Stand




Desktop holder

● Lock driver



● USB cable (sample)



● CD-ROM



● Warranty (Japanese)

● LISMO Sheet

● live earth Sheet

● Basic Manual (Japanese)



● Operating Precautions (Japanese)

● Global Expert User's Guide (Japanese)

● Instruction Manual (Japanese)




Info


- The microSD™ memory card is not included.
- An AC adaptor is not included. It is up to you to purchase a common AC adaptor 01 (option).

Names of Parts


Front

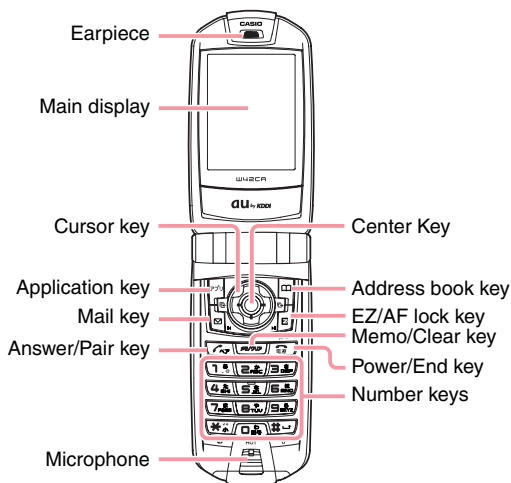



Back

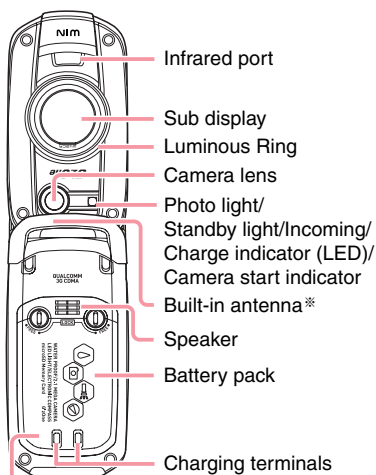

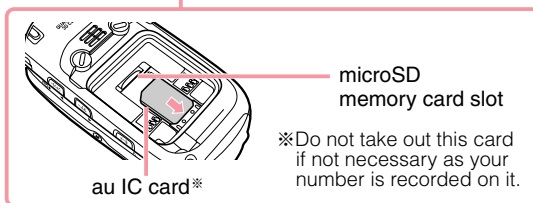

※Take care to avoid covering the built-in antenna with your hand when using the phone, using EZweb, and when accessing GPS information.

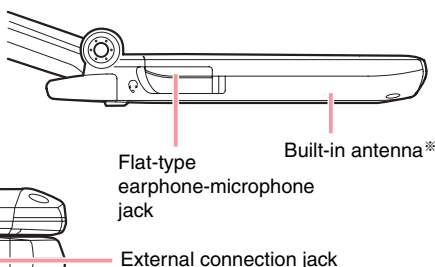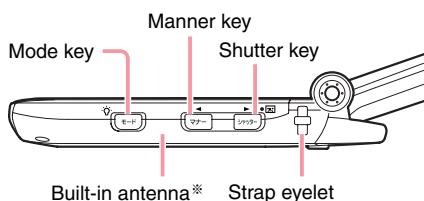


Side



Charging the Battery Pack

The battery pack that comes with the phone is not fully charged when you purchase it. Be sure to charge the battery pack before using the G'zOne W42CA for the first time. Charging takes about 130 minutes. You should recharge the battery pack whenever the battery level icon shows  or .

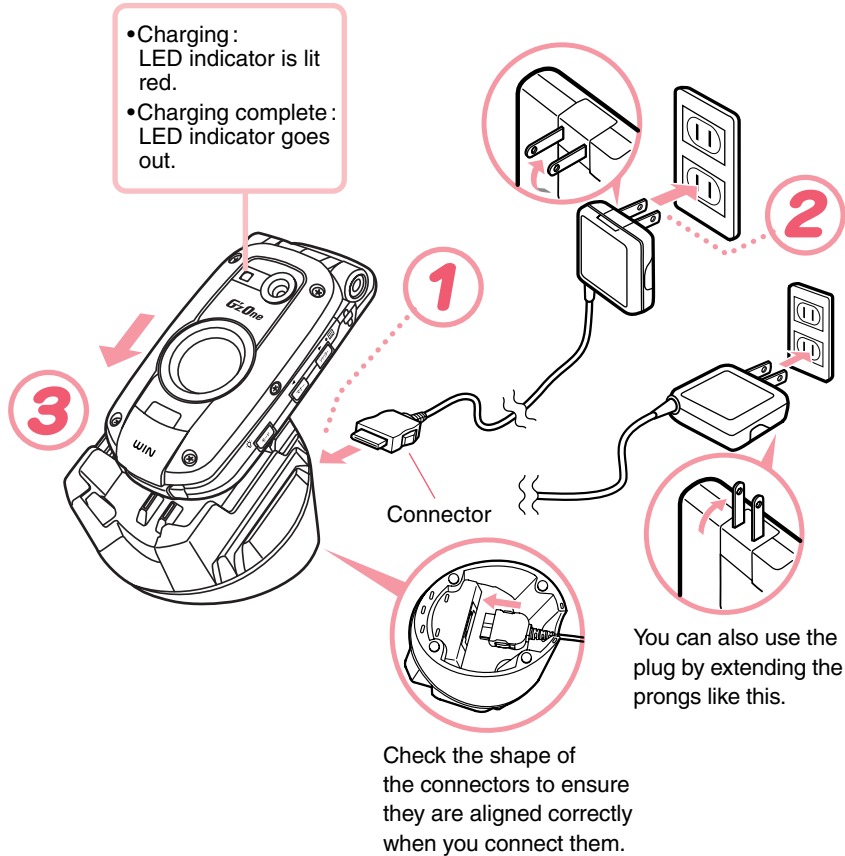

CAUTION

- ◎ You must purchase a common AC adaptor 01 (option) for charging. Note that the configuration of the AC adaptor may be different from that shown in the illustration above.
- ◎ Pull out the connector of the common AC adaptor 01 (option) straight so as to be parallel to the G'zOne W42CA or the desktop holder connector terminal when you connect them.

1 Connect the common AC adaptor 01 (option) to the desktop holder.

Check the shape of the connectors to ensure they are aligned correctly before you connect.

Trying to force a connection may damage the connectors.

2 Fold out the power plug of the common AC adaptor 01 (option), and then plug it into a 100V AC power outlet.

3 Insert the G'zOne W42CA into the desktop holder.


This will make the G'zOne W42CA charge LED indicator light red, and the battery level icon to change according to the following pattern:



When charging is completed, the battery level icon will show **FULL** and the LED indicator will go out.


To remove the G'zOne W42CA from the desktop holder, lift it straight up.

※ You can connect the common AC adaptor 01 (option) to the G'zOne W42CA to charge the battery pack.

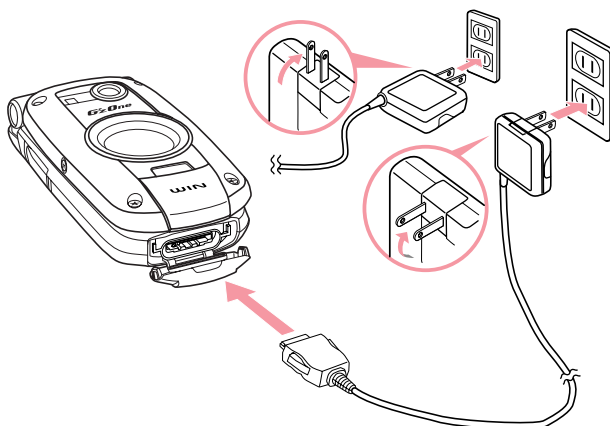

Check the shape of the connectors to ensure they are aligned correctly when you connect.

Turning On Power

1 Hold down  for at least 1.5 seconds.



The standby screen appears.

icon					
Signal Strength	Strong	Medium	Weak	Very Weak	Out of Range

- Communication is not possible while the signal strength icon is (Out of Range).
- Communication may not be possible while the signal strength icon is (Very Weak).



Standby screen

icon						
Battery Level	Fully Charged	High	Medium	Low	Fully Discharged	Extension Mode*

- During charging, the battery level icon will change according to the following pattern: → → → .
- The battery level icon (Fully Charged) only shows during charging.

※ Using Extension Mode

Using the Extension Mode, G'zOne W42CA automatically shuts down the radio wave after issuing the Low Battery Alert. This is quite a useful function that you can still check Outgoing/Incoming Records, Content of e-mail, Address Book, Schedule and so on when necessary. In this case, you can only use the functions which needs no radio wave.

▶ Page 97

■ Turning off power

Hold down  for about one second.

Initial Values

The initial values are as follows.

Lock No.	1234	Font Size	Add Book Char	Middle
Teens Lock No.	1234		Input	Middle
Caller ID	On		Mail Char	Middle
Incoming Display	On		EZweb Char	Small
Profile	Blank		Data Folder Char	Middle
			Text Memo Char	Middle

Personal Identification Numbers and Passwords

The G'zOne W42CA lets you use the numbers and passwords described below. Be sure to take steps so you do not forget your numbers and passwords. You will need them to perform various operations and to access subscription services.

Personal Identification Number (PIN)

Usage Examples	① For remote operation of the Voice Mail and Call Transfer from a standard phone
	② For inquiries, applications, and service modifications using au Customer Service Center voice guidance, au website, and EZweb
	③ For changing e-mail settings
Initial Values	4-digit number you entered on your subscription contract

Lock No.

Usage Examples	For modifying various phone settings
Initial Values	1234

Teens Lock No.

Usage Examples	For modifying various phone settings in Teens Mode
Initial Values	1234


EZ Password


Usage Examples	For entering and canceling subscriptions for EZweb fee-based content
Initial Values	4-digit number you registered for your first fee-based content subscription



Premium EZ Password


Usage Examples	① For entering and canceling subscriptions for EZweb fee-based content paid for using “まとめてau支払い” (combined au payment service)
	② For purchasing products from EZweb sites that use “まとめてau支払い” (combined au payment service)
Initial Values	4 to 8-digit number you registered for your first “まとめてau支払い” (combined au payment service) payment

Selecting English as the Display Language


- 1 While the standby screen is displayed, press .



- 2 Use  to select “機能設定” (SETTINGS), and then press .



- 3 Press  (画面表示/照明) (ScreenSetup/DisplayLighting).



4

5

(Set Language).



Ready

5

2

(English).

This selects English as the display language.

**CAUTION**

Even if English is selected as the display language, schedule and other dates are displayed in the format year/month/day. Folder names inside of the Data Folder are also displayed in year/month/day format.

Operation Basics

■ Key functions

- Displays incoming records.
- Returns to the previous menu screen.
- Selects an item.


- Displays the standby shortcut icon.
- Selects an item.

- Displays the EZ apps menu.

- E-mail
- C-mail (hold down for about one second).

- Dials/answers a phone call.
- Displays the Pair function.

- Memo
- Toggles Easy Voice Memo on and off (hold down for about one second).
- Deletes a character.
- Returns to the previous menu screen.



- Displays the calendar.
- Selects an item.

- Displays outgoing records.
- Scrolls forward one menu screen.
- Selects an item.


- Displays the main menu.
- Applies an item.

- Displays the address book.
- Creates a new address book (hold down for about one second).

- Displays the EZ menu.

- Toggles power on and off.
- Hangs up.
- Terminates a function.
- Returns to the standby screen.


- Inputs phone number.
- Inputs text character.

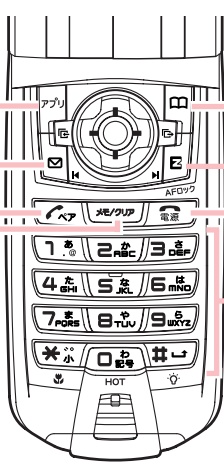

■ Side key functions

- Toggles Manner Mode on and off (hold down for about one second).

- Shutter release
- Photo function (hold down for about one second).




- Standby light illuminates when held down for more than one second.
- Photo light illuminates when shooting a photo.

Info

- If you lose track of where you are or if you make a mistake
Press to scroll back to the previous screen.
Press to return to the standby screen.
- When is in the lower right corner of the photo or movie screen, pressing will display key help.
- Holding down for about one second toggles side key's disabling feature on and off while the cellphone is folded. To cancel the side key's disabling feature, follow the above procedure with the phone unfolded.


Display Indicators

The following explains the main icons that appear on the standby screen.



1		Signal strength
2		Battery level
3		The microSD™ memory card (commercial item) is inserted into the cellphone.
4		During a call
5		EZ apps (BREW®)/Hello Messenger on
6		Unread mail
7		au Music Player/SD-Audio Player on
8		Key guidance on the EZweb browsing screen, the EZ Channel program playback screen, etc.
9		Current time The date and time are set automatically.
10		Selects the user defined icons such as calculator, Mobile Dictionary, Emission Off Mode, Mode Settings, Extension Mode, Note Pad 01, “カシオからのご案内” (information from Casio), Note Pad 02, “auからのご案内” (information from au), by pressing and .
11		Easy Voice Memo on
12		Manner Mode on
13		Ring tone off
14		Vibrator on
15		EZ Channel is in use.




Key symbols used in this manual




The cursor key described in this manual using the key symbols shown below.

or key:	
or key:	
, , or key:	


Main Menu

Pressing  while the standby screen is displayed displays the main menu. Use  to select the icon, and then press  (OK) to access the function associated with the icon.

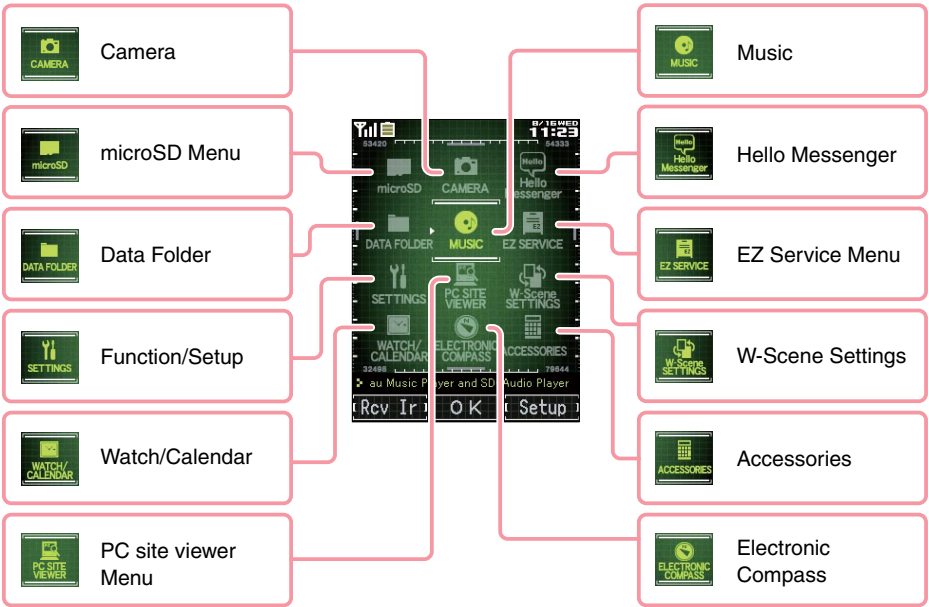


■ Using the Main Menu

Example: To display the setting screen from the main menu.

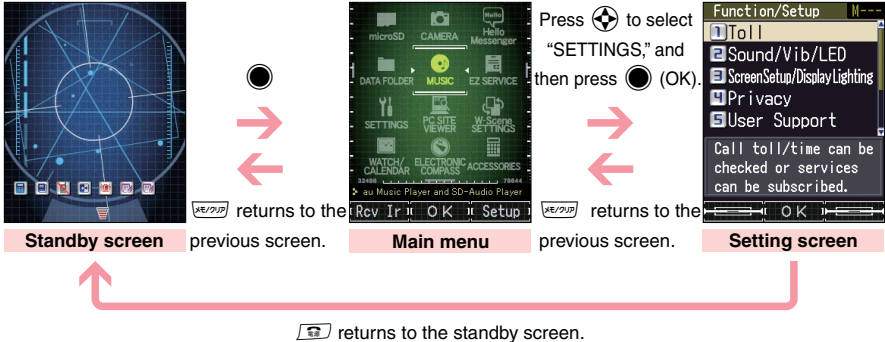

Using Soft Keys

Soft keys are the keys you use to execute the functions along with the bottom of the screen. The table below explains how to assign the soft keys to the on-screen functions. Note that the function of each soft key depends on the currently displayed screen.




Left soft key		Executes the function on the left.
Center soft key		Executes the function in the center.
Right soft key		Executes the function on the right.

Using Menus

Pressing the soft key that corresponds to the “Menu” at the bottom of the display will display a menu of various operations related to the function you are currently using.

Example: To open the photo monitor menu screen from photo monitor screen.

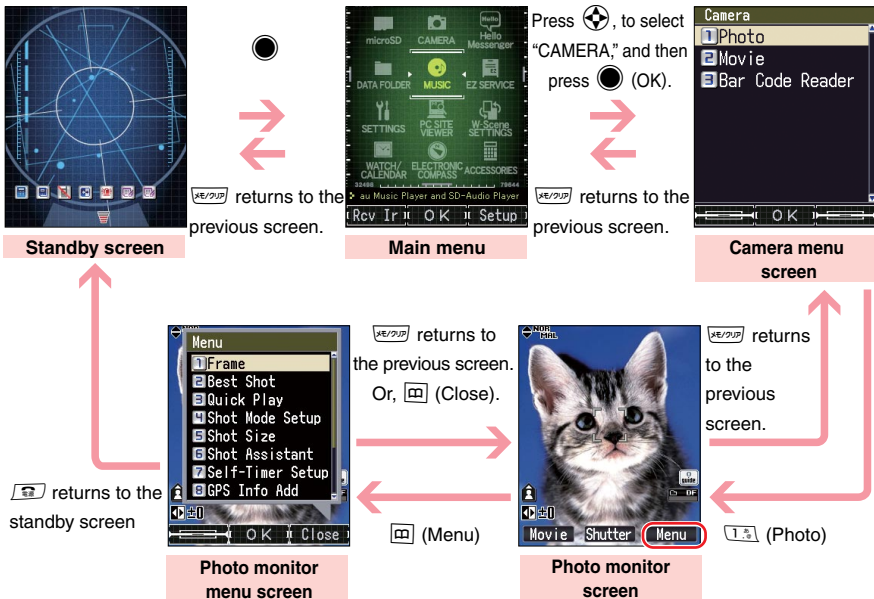

Initializing E-mail and EZweb

An EZweb subscription is required to use e-mail and EZweb. If you did not subscribe when you purchased your phone, contact your nearest au shop or the au Customer Service Center.

※ You will be assigned an e-mail address automatically when you perform the EZweb initialization procedure.

1 While the standby screen is displayed, press .



EZwebを利用するための
初期設定を行います。
PCサイトビューアの初期設定
も行われます。

OKを押してしばらく
お待ちください。

OK

2 Press .

Wait until the phone connects to the
server for initialization.



ようこそEZwebへ
お客様のEメールアドレスは、
△△△△△△△△@ezweb.ne.jp
です。

セフト
Eメールアドレスの変更は「OK」押
下後にEメールメニュー→Eメール設
定→その他の設定にて行
ってください。

【必ずお読み下さい】
auのXperiaサービス

OK

3 After your automatically assigned e-mail address appears, press .





Info



Pressing / also allows you to make initial settings.


Looking Up Your Current Phone Number and E-mail Address




- 1** While the standby screen is displayed, press .




- 2** Use  to select "SETTINGS," and then press  (OK).





- 3** Press  (Profile).


Your current phone number and e-mail address appear.






Info


You can also look up your phone number and e-mail address by pressing , and then  while the standby screen is displayed.


Changing Your E-mail Address

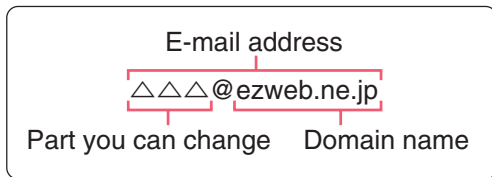


1 While the standby screen is displayed, press .





2 Press  (E-Mail Setup).




3 Press  (Other Setup).


When the EZweb connection confirmation screen appears, press  (Yes).




4 Press  (Eメールアドレスの変更) (Change E-mail Address).



- 5** Enter your PIN, press ● (OK), use ▲▼ to select “送信” (Send), and then press ● (Select). Use ▲▼ to select “承諾する” (Accept), and then press ● (Select).




- 6** Use ▲▼ to select the text box, and then press ● (Edit). Enter the e-mail address you want, and then press ● (OK).




To input an e-mail address
→ “Inputting an E-mail Address” (page 35)

- 7** Use ▲▼ to select “送信” (Send), and then press ● (Select).



The e-mail address confirmation screen appears.

- 8** Press ▲▼ to select “OK,” and then press ● (Select).



The message “正常に変更されました。” (Update is complete.) appears to indicate that your e-mail address has been changed.

Info

- ◎ Your PIN is the 4-digit number you entered on your subscription contract. If the wrong PIN is entered three times a day, the setting operation will be disabled until the following day.
- ◎ If your e-mail address won't change in step 7:
The new e-mail address you entered may be registered by someone else already. Try entering a different address.

Phone Call


Making a Call

- 1 While the standby screen is displayed, use the number keys (0 わ 記号 to 9 5 WXYZ) of the keypad to enter the phone number you want to call.



When calling a standard phone, you also need to enter the area code.

- 2 Press .

After you finish a call, press  to hang up.

Send Methods

Displayed when you press  (Call) in step 2.


Call : Your phone number is provided to the party you are calling in accordance with the caller ID setting of your phone.


184 Add : Your phone number is not provided to the party you are calling.

186 Add : Your phone number is provided to the party you are calling.



Answering a Call


- 1 Press  to answer an incoming call.

After you finish a call, press  to hang up.



Info

Display for Incoming Calls



If the caller's name is in your address book, it appears on the display. If not, only the caller's phone number is displayed.




A message like this appears when the phone number of the caller is not provided for some reason.


ID Unsent : The caller's phone refused to send its phone number.

Pay Phone : The call is from a pay phone.

Not Support : The call is from a phone that does not support caller ID.

Missed Call Notification




The message "Call X" will be on the display if you did not answer one or more calls. Press  (OK) to check incoming records (caller phone number, etc.).

To redial a number

→ "Redialing (Outgoing Records/Incoming Records)" (page 27)

Redialing (Outgoing Records/ Incoming Records)



1 While the standby screen is displayed, press .

 : Displays outgoing records.

 : Displays incoming records.



2 Use to select the record whose number you want to dial, and then press .



Info


The phone stores up to 50 records each for the outgoing records and incoming records. When a record is created while there are already 50 records in memory, the oldest current record is deleted automatically to make room for the new one.



One-ring Calls

What is a “one-ring call”?

A “one-ring call” is an incoming call that rings your phone only once, which aims it to be stored in your incoming records. If you redial the number shown in your incoming records, often you are connected to a dating service or some other service that may bills you very high charges. Always keep in mind that it is a good idea to avoid calling back unfamiliar numbers.

One-ring call indicator




The  icon indicates an incoming call you did not answer. The  icon indicates an incoming call that rang for four seconds or less.

These calls may be one-ring call with high possibility.


Changing the Ring Tone




- 1 While the standby screen is displayed, press **OK**.




- 2 Use **Up** to select "SETTINGS," and then press **OK**.




- 3 Press **2** (Sound/Vib/LED).



- 4 Press **1** (Incoming Call).




5 Press **2** (Melody).




6 Press **1** (Fixed Sound).

To hear the currently selected ring tone, press **アフリ** (Check).



7 Use **↑** to select the ring tone you want, and then press **●** (OK).


The ring tone is set.



Info


- The initial setting is "Incoming Tone1."
- You can also download a "Chaku-Uta®" from the Internet and use it for your ring tone.
→ "Downloading Chaku-Uta®" (page 70)

Adjusting the Ring Tone Volume




To adjust the ring tone volume, perform steps 1 through 3 under “Changing the Ring Tone” (page 28), and then continue with the following steps.

1 Press **[1 あ]** (Incoming Call).



2 Press **[1 あ]** (Volume).

To hear the ring tone at the current volume setting, press **[プレイ]** (Play).



3 Use **[↑]** to adjust the ring tone volume, and then press **[OK]**.



[↑] : Increases volume.

[↓] : Decreases volume.

Info

Step-up : Ring tone volume gradually increases.

Step-down: Ring tone volume gradually decreases.


Mute : Ring tone does not sound.

To display the “Step-up” and “Step-down” settings, select volume level 5, and then press **[↑]**.

To display the “Mute” setting, select volume level 1, and then press **[↓]**.


Adjusting the Earpiece Volume during a Call



1 During a call, use  to adjust the volume.

 : Increases volume.

 : Decreases volume.





You can adjust the earpiece volume (level 1-5).

Turning On Manner Mode


While Manner Mode is set to on, the phone alerts you to incoming calls by vibrating.



1 While the standby screen is displayed, hold down  for about one second.

This turns on Manner Mode, the  icon appears on the display while Manner Mode is turned on.




Turning on Manner Mode also turns on Easy Voice Memo, which is indicated by  on the display.

While Manner Mode is set to on, the phone vibrates without sounding its ring tone.


To turn off Manner Mode, hold down  for about one second again.

Turning On Easy Voice Memo



1 While the standby screen is displayed, hold down  for about one second.



This turns on Easy Voice Memo, the  icon appears on the display while Easy Voice Memo is turned on.

You can use Easy Voice Memos (up to 4 memos), and each memo can contain up to 20 seconds recording time.
If a new Easy Voice Memo is recorded when there are already four memos in memory, the oldest, unprotected memo that has already been played back is deleted automatically to make room for the new one. Protected Easy Voice Memos are not deleted.

To turn off Easy Voice Memo, hold down  for about one second again.

Info

Using the Voice Mail

The Voice Mail can be used to answer the phone and take messages when the phone is turned off, or when you are in a location where signal reception is not possible.

Playing an Easy Voice Memo





When there is a recorded Easy Voice Memos

The message “ Call” and “ EasyVoiceMemo” appear on the standby screen.




- 1 Select “ Call,” and then press (OK).

The incoming records list appears.



- 2 Use to select the record with the icon, and then press (Disp).

The incoming record detail screen appears.



- 3 Use to select “EasyVoiceMemo,” and then press (Play).

The easy voice memo plays back.



Info

To delete an Easy Voice Memo, press while the standby screen is displayed. Select the Easy Voice Memo you want to delete, press (Menu), and then (Delete). Next press (Delete One), and then press (Yes).

Inputting Characters

Input characters using keypad keys through through .

The table below shows the characters each key cycles through when you press it.



Key	Number of Presses								
	1	2	3	4	5	6	7	8	9
	.	@	-	_	/	:	~	1	
	a	b	c	A	B	C	2		
	d	e	f	D	E	F	3		
	g	h	i	G	H	I	4		
	j	k	l	J	K	L	5		
	m	n	o	M	N	O	6		
	p	q	r	s	P	Q	R	S	7
	t	u	v	T	U	V	8		
	w	x	y	z	W	X	Y	Z	9
	0 . @ - _ / : ! ? ~ () * # + , ^ ; < = > \$ ¥ % & [] ' ` { } " ~								
	Toggles between upper case and lower case (Example: a ⇔ A).								
	Returns to the previous character.								
	Undoes the last delete operation.								

- In order to input consecutive characters that are assigned to the same key, press to move the cursor, and then press input the next character.

CAUTION

Allowable Characters in Your E-mail Address

Your e-mail address (the part at the left of “@”) can contain up to 30 characters, including single-byte English lower case letters, hyphens (-), periods (.) and underbars (_).

A period (.) or a zero (0) cannot be used as the first character.

Characters and symbols that are shaded in the above table cannot be used at the left of “@” in the address format “△△△@ezweb.ne.jp.”

Info

You can input a period (.) or “at” symbol (@) by pressing .

Inputting an E-mail Address

Inputting “mark@ezweb.ne.jp”

In this example, we will input “mark@ezweb.ne.jp” for “<E-Mail Add1>.” To input “<E-Mail Add1>,” perform steps 1 through 6 under “Registering an Address Book” (page 38), and then perform the following steps.



1



Input “mark.”

To input “m”: Press **6** **1st** once.
 To input “a”: Press **2** **1st** once.
 To input “r”: Press **7** **1st** three times.
 To input “k”: Press **5** **1st** twice.



2

Press **[Menu]** (Menu).



3


Press **1** **1st** (Emoticon/Useful Sentence), and then **2** **1st** (Useful Sentence).



4


Use **[Up]** to select “@ezweb.ne.jp,” and then press **[OK]**.

“mark@ezweb.ne.jp” is inputted.
 You could also input “@ezweb.ne.jp” by pressing **0** **1st** **2nd**.





Inputting Pictographs and Useful Sentences

The following procedure shows how to input pictographs and useful sentences into the body text when creating a new e-mail message.




- 1 Press **アプリ** (Char), and then **は** (Char), and then **😊** (Pictograph).

You can also select a pictograph by pressing **㊦**.





- 2 Use **⬆** to select the pictograph you want, and then press **⬤** (Select).



Use **⬅** and **➡** to scroll through the various categories of pictographs. To input consecutive pictographs, press **㊦** (Serial).






- 3 Press **㊦** (Menu), **2** (Char), and then **㊦** (Useful Sentence).



4

Use  to select the useful sentence you want, and then press  (OK).

Here we will select “Happy birthday!.”
You can also input “Happy birthday!” by pressing  .





Info


The following shows the input screens for symbols (double-byte) and emoticons.





Symbol (Double-byte) Input



In step 1 of the above procedure, press  (Char), and then  (&@) to display the “FullSym” (double-byte symbol menu).

Emoticon Input





In step 3 of the above procedure, press  (Emoticon) in place of  (Useful Sentence) to display the emoticon menu.
You can also display the emoticon menu by pressing  in place of  (Menu) in step 3.


Address Book

Registering an Address Book





- While the standby screen is displayed, hold down  for about one second.







- Select “ <Name>,” and then press .




- Enter the name, and then press .

The  <Reading> is generated automatically when you enter a name.
To input text
→ “Inputting Characters” (page 34)




- Use  to select “ <Phone Number1>,” and then press .



5 Enter the phone number, and then press (OK).

When entering the number of a standard phone, be sure to include the area code.





6 Use to select “ <E-Mail Add1>,” and then press (Edit).

If you do not want to enter an e-mail address, jump to step 8.



7 Enter the e-mail address, and then press (OK).

To input an e-mail address
→ “Inputting an E-mail Address”
(page 35)



8 Press (Reg).






Info

- The Address Book can contain up to 700 records.
- Address Book Records are numbered from 000 through 699. A new record is automatically assigned to the lowest available unused record number.
- An Address Book Record can also contain a keyword, website URL, street address, birthday, and other personal information.

Editing an Address Book Record







Example: To edit the phone number of “Tom Carter”


- 1 While the standby screen is displayed, press , use  to select the record you want to edit, and then press  (Menu).





- 2 Press  (Modify), and then  (Overwrite).



- 3 Use  to select “ 0900006XXXX,” and then press  (Edit).






- 4 Make the changes you want, press  (OK), and then  (Reg).


To delete characters, press .





Adding Outgoing or Incoming Record Data to the Address Book





1 While the standby screen is displayed, press , use  to select the phone number you want to save, and then press  (Menu).




-  : Displays outgoing records.
-  : Displays incoming records.

2 Press  (Reg Add Book).





3 Press  (Reg New).

To enter the name, use the procedure starting from step 2 under “Registering an Address Book” (page 38).



Dialing from the Address Book







- 1 While the standby screen is displayed, press , and then use  to select the record whose phone number you want to dial.



- 2 Press  (Disp).

The details screen of the record appears.



- 3 Use  to select the phone number, and then press .





Pair Function






You can save up to five phone numbers (like frequently used ones from the address book). You can make calls, send mails to or use Hello Messenger with these saved numbers (called Pair Partners) more easily.


Registering a Pair Partner


- While the standby screen is displayed, press .

If the Pair partner is not registered, the confirmation screen appears. Press  (OK). Use  to select the 1 through 5 tab where you want to register the Pair partner.






- Use  to select "Register+Check," and then press  (OK).



- Press  (Register).




- Use  to select the address book record for the person you want to register as a Pair partner, and then press  (Select).



When there is more than one phone number/e-mail address registered in the address book, the Pair function phone number/e-mail address selection screen will appear.

- Press  (Reg).




Making a Phone Call, Sending Mail, Invite a Pair Partner to a Hello Messenger Meeting



1

While the standby screen is displayed, press .



2

Use to select the Pair partner.



3

Use to select “Call,” and then press (OK).



Selecting “Send E-Mail”/“Send C-Mail,” and then pressing (OK) will display a screen for composing and sending an e-mail/a C-mail message. Next, continue from step 5 of the procedure under “Creating and Sending E-mail Messages” (page 47)/“Creating and Sending C-mail Messages” (page 53). After selecting “Hello Messenger,” pressing (OK) will display the screen for inviting a Pair partner to a Hello Messenger meeting. Next, continue from step 4 of the procedure under “Invite the Members to the Meeting” (page 57).

Info

In order to register a person as a Pair partner, that person's name, phone number, and other information need to be in the address book beforehand. Use the procedure under “Registering an Address Book” (page 38) to create the required record before trying to register a person as a Pair partner.



Your G'zOne W42CA supports two types of mail: e-mail and C-mail.

Using E-mail

To use e-mail, you need to subscribe to an EZweb service. If you did not subscribe when you purchased your phone, contact your nearest au shop or the au Customer Service Center.


In addition to an EZweb subscription, you also need to perform an initialization procedure before you can use e-mail. If you have not performed initialization yet, refer to "Initializing E-mail and EZweb" (page 22).

E-mail makes you possible to exchange mails with a PC and with another cellphone that supports e-mail function.

You can send mail messages that contain up to 5,000 double-byte characters (10,000 single-byte characters), and you can attach photos and movies to e-mail messages.

Page 47

- ※ You can send an e-mail up to five addressees at a time.
- ※ You can send up to 1,000 e-mail messages (each addressee counts as a separate message) per day.
- ※ The sending and receiving operations may take longer when a mail message has data attached.

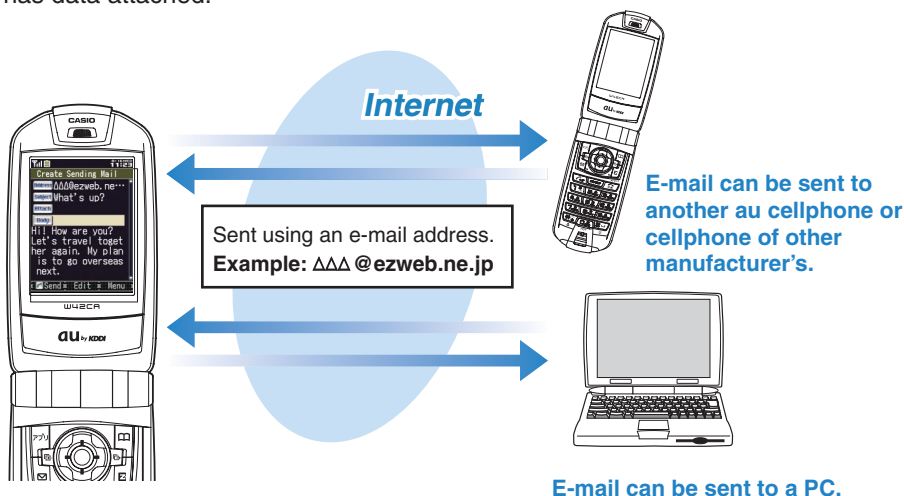

Using C-mail

C-mail lets you exchange text messages that contain up to 50 double-byte characters (100 single-byte characters) with another au cellphone that supports C-mails.

Page 53



C-mail Center

Sent using a phone number.
Example: 090-0001-XXXX

Received using a phone number.
Example: 090-0002-XXXX





C-mail can be sent to another au cellphone.

About C-mail safe block function


- C-mail safe block function blocks C-mails that contain accessing URLs (<http://△△△>, <https://△△△>) or phone numbers in its body text. C-mail safe block function is set to on by default. If you want to receive C-mails that contain accessing URLs or phone numbers in their body texts, you can disable this function to receive such C-mails.

Creating and Sending E-mail Messages





- 1 While the standby screen is displayed, press , and then press  (Create New).






- 2 Select **Address**, and then press  (Edit).


Address: Address to which the e-mail will be sent.



You can send an e-mail up to five addressees at a time.





- 3 Press , use  to select an addressee, and then press  (Select).

You can select an addressee from sending records, receiving records, or My Address, or you can enter an address.



- 4 Use  to select the e-mail address you want to enter, and then press  (OK).




5 Use to select **Subject**, and then press (Edit).

Subject: Subject of the e-mail message.





6 Enter the subject, and then press (OK). Use to select **Body**, and then press (Edit).

Body: Body of the e-mail message.




7 Enter the body text, and then press (OK).



8 Press (Send) or .

“フォトメール便送信” (Photo Mail), “マイ絵文字送信” (My Pictograph), “お手軽絵文字送信” (Easy Pictograph) are the auto address converter (a part of the e-mail address will be converted automatically).

To use “お手軽絵文字送信” (Easy Pictograph) (free) or “マイ絵文字送信” (My Pictograph) (paid) services, you need to subscribe to the EZweb contents, “絵文字め〜る” (Pictographs Mail).



9 Press (Send).

The message “Sent.” appears on the display after the e-mail message is sent.



Reading Received E-mail Messages



When you receive an e-mail

The message “E-Mail” and  appear on the standby screen.


Received e-mail icon



Mail

1

Select “ E-Mail,” and then press  (OK).




2



Press  (OK).

 : Indicates an unread message.

 : Indicates an already read message.




3

Use  to select the unread e-mail you want to view, and then press  (Disp).

The received e-mail message appears.

If all of the message cannot be displayed, press  to scroll.

Use  and  to scroll between messages.

Press  to return to the e-mail message list.






Reading an E-mail Message with an Attached Photo or Movie





Example: To see a photo attached to an e-mail.


1

Use  to select the e-mail message, and then press  (Disp).





2

Use  to select a file name, and then press  (Play).



Info


- ◎ Depending on the size of the photo or movie file, the file may not appear within the mail in step 2 of the above procedure. If this happens, select the file name and press  (Rcv),  (Play).
- ◎ The sending and receiving operations may take longer when a mail message has data attached.
- ◎ Certain signal conditions may also cause e-mail sending and receiving to take longer than normal.

Replying to a Received E-mail Message

To reply to an e-mail message, perform steps 1 through 3 under “Reading Received E-mail Messages” (page 49), and then perform the following steps.




1 Press **アプリ** (Reply).



2 Press **●** (Edit), and then enter the body text.

Subject is prefixed with “Re:,” and the body text of the e-mail is quoted.
For the remainder of this procedure
→ Perform the procedure starting from step 7 under “Creating and Sending E-mail Messages” (page 47).



Avoiding Spam

It is recommended that you use our mail filter function to block spam.

You can use “Supportive settings” to easily configure mail filter settings by answering questions that appear on the display.



■ Configuring Mail Filter Settings


Example: To access the “サポート設定” (Supportive settings)

- ① While the standby screen is displayed, press
 - ② Press (E-Mail Setup) → (Mail Filter) → (Yes).
 - ③ Use to select “次へ” and then press (Select).
 - ④ Enter your PIN, press (OK).
- Use to select “送信” and then press (Select).

Next, follow the instructions that appear on the display.

■ “カンタン設定” (Simple Settings)


“サポート設定” (Supportive settings)	You can choose filtering options by answering our questions It is recommendable for those who want to check the filtering conditions one by one.
“フィルターレベル(高)” (Filter level (Strict))	You can block the all incoming mails from PC. It is recommendable for those who use only cellphones to send e-mails.
“フィルターレベル(中)” (Filter level (Medium))	You can block the incoming e-mails from specified senders. It is recommendable for those who are bothered by specified spam senders.
“フィルターレベル(低)” (Filter level (Normal))	You can block the incoming e-mails containing “未承諾広告※” (Unsolicited advertisement) in their titles, and “なりすましメール” (Spoof e-mail) It is recommendable for all e-mail users.




Info

You can prevent spam by changing your e-mail address. See “Changing Your E-mail Address” (page 24) for information about how to change your e-mail address.



Creating and Sending C-mail Messages



- 1 While the standby screen is displayed, hold down for about one second, and then press (Create New).




- 2 Select , and then press (Edit).





- 3 Press (Address Book), use to select an addressee, and then press (Select).


You can also select a phone number from sending records or receiving records, or you can enter an address.



- 4 Use to select the phone number you want to enter, and then press (OK).



- 5** Use to select **Body**, and then press (Edit). Enter the body text, and then press (OK).



- 6** Press (Send) or . When the C-mail reaches the other party, the message “Completed.” appears, and the message is stored in your sending records.




Reading Received C-mail Messages

When you receive a C-mail.



The message “ C-Mail” and appear on the standby screen.

Received C-mail icon




- 1** Select “ C-Mail,” and then press (OK).

: Indicates an unread message.



- 2** Use to select the unread C-mail you want to view, and then press (Disp).


The received C-mail message appears.
Use and to scroll between messages.
Press to return to the C-mail message list.



Hello Messenger

“Hello Messenger” is like a portable chat room which allows you to send text, sound and photo in real time to all the chatters (using au cellphone supporting this service).


All chatters are represented by cartoon-style characters they selected. The host can invite up to 4 people from the address book entries.

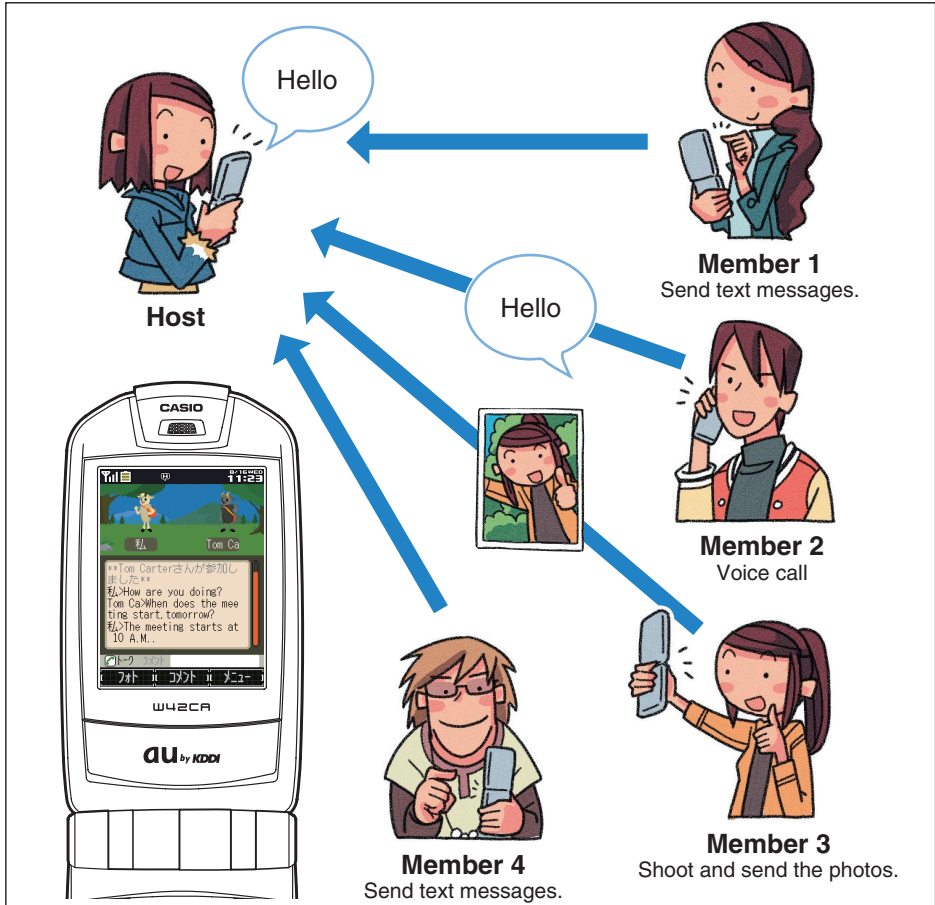




CAUTION

- ◎ Due to the conditions like frequent use, location, or signal conditions, the time you can use for meeting may become shorter than usual.
- ◎ Two to five people can use this service at the same time.


Displays the Hello Messenger Menu

1 While the standby screen is displayed, press .



2 Use  to select “Hello Messenger,” and then press  (OK).




When you start Hello Messenger for the first time, press  (OK) and select your own cartoon-style character, then press  (設定) (Setting).

Item	Outline
スタート (Start)	Select the members to invite to the meeting
コメントログ (Comment log)	Displays Comment log (meeting records)
ヒント (Hint)	Displays operations basics
オプション (Option)	Makes various settings



Character list

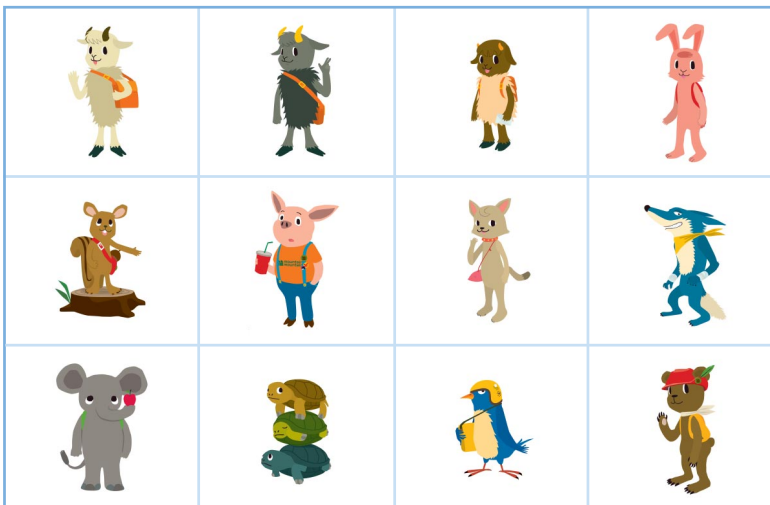
From these 12 original characters, you can select the one as your own character.






Invite the Members to the Meeting

You can invite the members to start the meeting. To start the meeting, perform steps 1 through 2 under “Displays the Hello Messenger Menu” (page 56), and then continue with the following steps.


- 1 Use  to select “スタート” (Start), and then press  (選択)(Select).



- 2 Use  to select “アドレス帳” (Address Book), and then press  (選択)(Select). Use  to select the members.



To select the members from the address book entries, perform steps 1 through 2 under “Dialing from the Address Book” (page 42).

- 3 Press  (選択)(Select).

The member list appears.


Your name is shown on the top of the list (or “私” (Me) is shown when your name is not registered in the profile).


Your name or “私” (Me) cannot be changed or deleted.

“私” (Me) is shown on the list when your name is not registered in the profile.

To add members, select the blank column and press

 (選択)(Select), and perform steps 2 through 3.



- 4 Press  (お誘い)(Invite).

The member registered in your list gets an invitation message.

When you see “〇〇さんが参加しました” (XX joined) appears on the display, you can start meeting with the member.



You can register the member from “ハローランキング” (Hello Ranking) or “グループ” (Group).

When You Get an Invitation Message to Join



When you get an invitation message to join, ring tones sounds or your cellphone vibrates. The invitation screen (inviting you to join the meeting) appears. When you set “着信モード” (Incoming Mode) to “自動応答モード” (Auto Response), no ring tone sounds, and you can start meeting without any operation.

When you get an invitation message to join

The message (inviting you to join the meeting) appears on the display.



1

Use  to select “参加” (Join), and then press  (OK).



On the incoming screen, you can see the host's name, total number of the members, and the time of acceptance.

- With Manner Mode set, no ring tone sounds from speaker or Casio flat-type stereo earphones 03 (option).
- Even with Manner Mode set, vibrator setting for “ハロー着信音” (The Ring Tone for Hello Messenger) has the priority over the Manner Mode.

Camera Features

Your G'zOne W42CA comes with a built-in 2.1-megapixel, 2.07-million effective pixel camera to shoot photos and record movies. You can attach the photos and movies that you shot/recorded to e-mail messages.


Using the Camera

Shooting a Photo (page 61) Recording a Movie (page 62)

1

Use your images for G'zOne W42CA functions!

You can use photos you shot for the standby screen, for the image that appears while the ring tone is sounding, and in your address book.

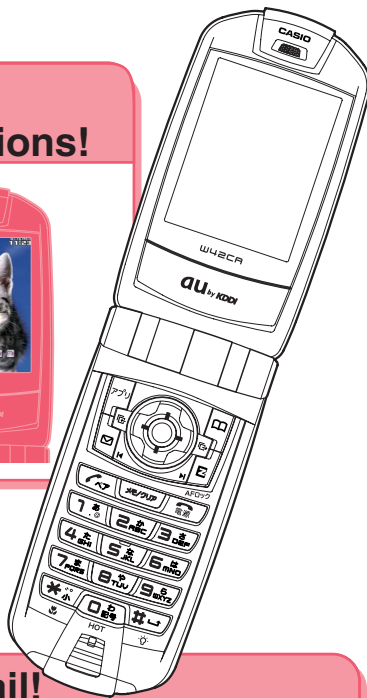


Camera

2

Send images by e-mail!

Within 500KB*, you can send a photo or a movie (shot or recorded with Mail Mode) as an e-mail attachment.


※ Certain signal conditions may cause e-mail send and receive to take longer than normal.



Tips for Better Photos


Shooting a Phone, Wallpaper size, etc. image


Do not cover the lens with your hands. Hold the camera securely with both hands.

Use your thumb to press  (Shutter) to release the shutter.



Shooting a VGA, SXGA, or UXGA size image

Do not cover the lens with your hands. Hold the camera securely with both hands. Use the index finger of your right hand to press  to release the shutter.



Tips for Avoiding Hand Movement

- Remain steady by keeping your arms lightly against your sides and standing with your feet about shoulder width apart. Having your arms away from your side or extended in front of you can cause blurred images.
- When you press the shutter button, remain still until your shutter tone finishes sounding. This is especially important when shooting where lighting is dim.
- A self-timer is also provided for shooting photos. With the self-timer, you do not need to press the shutter button to shoot a photo, so there is less chance of a blurred image caused by accidental movement of the phone.

Auto focus

G'zOne W42CA has built-in auto focus function. You can shot photos with the subject properly focused simply by pressing the shutter key.


Photo and Movie Sizes

The following shows the sizes of the photos and movies that can be recorded with your G'zOne W42CA.

Photo Sizes


Phone	120 × 160	①
Wallpaper ※	240 × 320	②
VGA	640 × 480	③
SXGA	1280 × 960	④
UXGA	1600 × 1200	⑤

※ The image size is the same as "Wallpaper" when Coupling Shot, Updown Shot, Serial Shot, or Wallpaper is selected as the recording mode.



Movie Sizes




Mail Mode	Standard S	96 × 80	①
	Standard M	128 × 96	②
	High Quality M	176 × 144	③
	High Quality L	320 × 240	④
Video Mode	QVGA	320 × 240	④





Camera


Shooting a Photo





- 1 While the standby screen is displayed, press , use  to select “CAMERA,” and then press  (OK).



- 2 Press  (Photo).




- 3 Point the lens at the subject, and then press  (Shutter).



The phone emits a shutter sound.

Note that the phone emits the shutter sound even if it is in Manner Mode.

You can also press  in place of .

Check the subject through the monitor screen (within the area indicated as ,), and release the shutter.

- 4 Press  (Save).




The display shows the message “Saved to data folder (Phone).,” and then returns to the photo monitor screen.

Photos you shot are saved to the “Photo Folder,” which is in the Data Folder.

Recording a Movie



- 1 While the standby screen is displayed, press **OK**. Use **Left Arrow** to select “CAMERA,” and then press **OK** (OK).



- 2 Press **2 (Movie)**, point the lens at the subject, and then press **OK (Rec)**.



The phone emits a shutter sound to signal the start of recording.
Note that the phone emits the shutter sound to signal the start of recording even if it is in Manner Mode.
You can also press **Shutter** in place of **OK**.

- 3 To stop recording, press **OK (End)**.



Even if you do not press **OK (End)**, recording will stop automatically after about 15 seconds.
The phone emits a shutter sound when recording stops.

- 4 Press **OK (Save)**.



The display shows the message “Saved to data folder (Phone).,” and then returns to the movie monitor screen.
Movies you recorded are saved to the “Movie Folder,” which is in the Data Folder.

■ Meanings of the Photo Titles

The initial photo mode setting when you purchase your G'zOne W42CA is "Phone Mode (Wallpaper 240×320)".

Meanings of the Photo Titles in the "Photo Folder," which is in the Data Folder.




Example of a Photo Title 060816_1123~0001

Date: August 16, 2006



Time: 11:23 a.m.

Serial Number

When You Shot Photos Mistakenly

If the photo is not what you want, press  or  in place of  (Save) in step 4 of the above procedure. Next, repeat step 3 to reshoot.

Displaying Key Help

While  (key help icon) is displayed in the lower right corner of the screen, press  to display key help.

Press  again to exit key help.

■ Meanings of the Movie Titles

The initial movie mode setting when you purchase your G'zOne W42CA is "Mail Mode (High Quality L 176×144)". The maximum recording time in "Mail Mode" is 15 seconds.

Meanings of the Movie Titles in the "Movie Folder," which is in the Data Folder.

Example of a Movie Title 060816_1123~0001

Date: August 16, 2006


Time: 11:23 a.m.

Serial Number



※ "S_" is added to the beginning of the movie title when the movie size is "Standard S."


When You Recorded Movies Mistakenly

If the movie is not what you want, press  or , and then

 (Cancel) in step 4 of the above procedure. Next, repeat step 2 to rerecord.




Displaying Key Help

While  (key help icon) is displayed in the lower right corner of the screen, press  to display key help.



Press  again to exit key help.


Viewing Photos and Movies





- 1 While the standby screen is displayed, press  and, use  to select “DATA FOLDER,” and then press  (OK).



- 2 Use  to select “Photo Folder,” or “Movie Folder,” and then press  (Detail).






Selecting “All Data” displays a list of all photos and movies in the “Photo Folder” or “Movie Folder.”

- 3 Use  to select the dated (by recording date) folder, and then press  (Detail).



A list of all movies that were recorded on that day are displayed.

- 4 Use  to select the photo or movie you want to play, and then press  (Disp/Play).



The photo or movie displays/plays.

※ To pause movie playback, press  (II).


Playback will stop automatically when the movie ends.

Attaching a Photo or Movie to an E-mail Message

Perform the procedure from step 1 to 3 under “Shooting a Photo” (page 61) or “Recording a Movie” (page 62), and then perform the following steps.

1 Press (E-Mail), and then press (Attach).

Photos you shot are stored in the “Photo Folder” and movies are stored in the “Movie Folder,” (those folders are in the Data Folder).




2 Perform the procedure starting from step 2 under “Creating and Sending E-mail Messages” (page 47) to create an e-mail message.


※ A movie attached to an e-mail can be played only on the cellphone that supports movie playback or on a PC.

Using Photo Mail

Photo Mail automatically converts images so as you can view them properly on a non-au cellphone. In order to use Photo Mail, you need to change the receiver's e-mail address to a special Photo Mail address.

When you send an e-mail using the auto address converter, the e-mail address will be converted automatically as shown below.

To use the auto address converter, press  “フォトメール便送信” (Send Photo Mail) on the e-mail select sending method screen.



Addressee Service	E-mail Address	Converted Address
DoCoMo	△△△ @docomo.ne.jp	△△△ @d.nepm.jp
Vodafone	△△△ @ □ .vodafone.ne.jp	△△△ @ □ .vodafone.nepm.jp
TU-KA and au phone without movie mail support	△△△ @ezweb.ne.jp	△△△ @ezweb.nepm.jp

□ varies depending on subscription region.

Info

To use “お手軽絵文字送信” (Easy Pictograph) (free) or “マイ絵文字送信” (My Pictograph) (paid) services, you need to subscribe to the EZweb contents, “絵文字め〜る” (Pictographs Mail).




Using EZweb

To use EZweb, you need to subscribe to an EZweb beforehand. If you did not subscribe when you purchased your phone, contact your nearest au shop or the au Customer Service Center.

In addition to an EZweb subscription, you also need to perform an initialization procedure before you can use EZweb. If you have not performed initialization yet, refer to “Initializing E-mail and EZweb” (page 22).


EZweb allows you to access to Chaku-Uta®, the latest news, and other web-based contents.

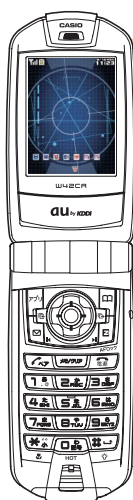

While the standby screen is displayed



Internet



Wallpaper

Games

Latest news

Weather reports

Traffic reports


Chaku-Uta®

Chaku-Uta-Full®

Displaying the EZ Top Menu

1

While the standby screen is displayed, press **[E]**, and then press **[1 あ]** (Top Menu).



①	カテゴリで探す (Search by category) Searches for a site by category
②	キーワードで探す (Search by keyword) Searches for a site by keyword
③	最新情報 (Latest Information) Introduces the list of new special features or contents started at EZweb
④	トップニュース (Top News) Provides the automatically-updated latest top news
⑤	ビジネス&ニュース (Business & News) Provides the latest information such as news, weather, share prices, and other information beneficial for business
⑥	エリア (Area) Provides district information such as weather or map
⑦	ショッピング&オークション (Shopping & Auctions) Provides information about shopping malls where you can purchase goods with your cellphone and the information about the net auction where you can sell or buy easily
⑧	ライフ (Daily life) Provides useful information for daily life
⑨	ホビー&カルチャー (Hobbies & Culture) Provides the latest information about games, fortune-telling, music, e-books, and information about hobby and entertainment trends
⑩	au style Introduces au-recommended information and sites
⑪	とくする情報 (Valuable Information) Provides gifts and useful information exclusively for EZweb service subscribers for free
⑫	EZサービスで探す (Search by useful EZ services) Introduces useful, amusing and recommended services special to EZweb
⑬	料金・申込・インフォ (Charges, Applications, and Info) Provides phone bills, procedures, au information, and au on-line manuals
⑭	災害用伝言板 (Disaster Message Board) Registers/checks the safety information in disasters
⑮	ENGLISH Introduces English sites





CAUTION


- ◎ The layout and contents of the EZweb screens are example. These are subject to change.
- ◎ Some sites may charge you for the content in addition to call charges.

Bookmarking Sites You Frequently Access




- 1 Display the site you want to bookmark, and press  (BrowserMenu).






- 2 Press  (New bookmark).

※ You may not be able to bookmark some sites.



- 3 Press  (Reg.).



- 4 Use  to select a folder, and then press  (OK).

The message “Registered” appears when completed.





Info

You can have up to 100 sites bookmarked in the Favorite Site list.


Viewing a Bookmarked Site



- 1 While the standby screen is displayed, press .



- 2 Press (Favorite Site).



- 3 Use to select a site or folder, and then press (OK).




If you selected a folder, use to select a site, and then press (OK).

Downloading Chaku-Uta®

To download a Chaku-Uta®, perform step 1 under “Displaying the EZ Top Menu” (page 67), and then perform the following steps.



- 1 Use to select “カテゴリで探す” (Search by Category), and then press (OK).



- 2 Use to select “着うた” (Chaku-Uta®), and then press (Select).



- 3 Select the content (desired information site), and download it.

In order to use fee-based contents, you need to enter your EZ password or premium EZ password.

EZ Password:

This is the 4-digit number you specified when you first subscribed to the fee-based contents.

Premium EZ Password:

This is the 4 to 8-digit number you registered for your first “まとめてau支払い” (combined au payment service) payment.

Input the required password according to the instructions that appear on the display. The first time you use a site, register the password you want to use.

To download information, follow the instructions that appear on the display.

Downloaded data is stored in the Data Folder.

CAUTION




In addition to call charges, you will be charged according to the pricing policy of each site to download Chaku-Uta® and other contents from a fee-based site.


Info



Perform the same procedure to download wallpaper and use it for the standby screen background.


Downloading Chaku-Uta-Full®





- 1 While the standby screen is displayed, press , use  to select “EZ SERVICE,” and then press  (OK).



- 2 Use  to select “au Music,” and then press  (OK).



- 3 Use  to select “Jump to EZ Music!,” and then press  (OK).



This operation connects the phone to “EZ Music!.” For the operations after connecting, follow the instructions displayed on the screen.

Info

You can also download Chaku-Uta-Full® by selecting “着うたフル” (Chaku-Uta-Full®) performing step 2 under “Downloading Chaku-Uta®” (page 70).


Checking Charges


You can check call and transmission charges.



1



While the standby screen is displayed, press



When the EZweb connection confirmation screen appears, press
 (Yes).



2

Use  to select the item you want to check, and then press  (Select).



EZ Channel

EZweb subscription required


EZ Channel allows you to automatically download the programs (the ones you selected and preregistered) to your G'zOne W42CA. Every updated program will be delivered to your G'zOne W42CA since late at night to early morning (2:00 a.m. - 8:00 a.m.).

■ Displaying EZ Channel Menu




Standby screen

Press **[E]**, and then press **[4.5]** (EZ Service Menu).



EZ Service Menu

Press **[3.3]** (EZchannel).



EZChannel Menu

■ Enjoying EZ Channel

① Register the programs you are interested in.

You can register up to 3 programs from "Program Guide."

They are downloaded automatically since late at night to early morning, and then saved in "Reg Program."



© ナノ・メディア
© ジェイ・スポーツ・ブロード
キャスティング
© 伊藤忠商事



② Playback the program.

You can watch the program saved to "Reg Program" whenever you want.



© weathernews
© レーベルモバイル株式会社
© 時事通信/アクセス・パブリッシング



③ Save the program.

When a registered program is updated, the program is overwritten with new one.

You should save the programs you do not want to delete in "Multi Folder" etc.

※ In some cases, you may not be able to save a program because of copyright protection.



Info

- You need to perform an initialization procedure before you can use EZ Channel. If you have not performed initialization yet, refer to "Initializing E-mail and EZweb" (page 22).
- With EZ Channel service, you may get a large data by each program (maximum of approximately 5MB). To cost less, you may want to subscribe to Packet Communication Discount Service before use.
- When the scheduled delivery time comes, the programs are automatically downloaded. Turn on the cellphone with its battery pack full, and put it in the area with good reception.
- The display layout and contents are examples. These are subject to change.

EZweb (EZ Channel)

EZ Navi Features

EZweb subscription required


EZ Navi uses global positioning system (GPS) information to provide you with useful information.

You can use various sites such as “EZ Navi Walk” that navigates you to your destination, “Position Search” that allows you to check where your child is, and “Area Message” that lets you know when your child is coming close to the destination.




Standby screen

Press **[E]**, and then press **[4.5]** (EZ Service Menu).



EZ Service Menu

Press **[2.8]** (EZnavi).



EZ navi menu

Checking your route: “EZ助手席ナビ” (Passenger seat Navi)

This is a service that a person in an automobile's passenger seat of an automobile can use to check the route to a destination using voice and map images.

※ This application is not included when you first purchase the phone. After accessing Passenger seat Navi, you need to download the application to use it.

When you check where your child is: “安心ナビ位置確認” (Position Search)



This is a service that you can check the location of an au cellphone supporting “Position Search” by operating G'zOne W42CA. There are two kinds of services: “いつでも位置確認” (Auto Position Search) (paid) and “位置確認メール” (Position Search Mail) (free).




Receiving an e-mail alert whenever another phone enters or exits a particular area during a specific time of day: “安心ナビエリア通知” (Area Message)

Alert mail is sent to a particular au phone whenever another phone enters (or is inside of) or exits (or is outside of) a preset area.



EZnaviwalk


A menu of useful options you can use while you are out.



オススメ (New)	The latest news and featured information ※ “おためしナビ”(Navi Demo) provides the demonstration of voice navigation or Voice input function.
乗換検索* (Transfer Search)	Searchable source of train transfer and timetable information
ナビ* (Navigation)	Voice navigation to a specific destination, and “My Spot” registration
現在地 (Current Location)	Searchable source of maps, shops, and other information about your current location
道路情報 (Traffic Information)	Searchable source of real-time nationwide traffic information
設定登録 (Setups and Registrations)	Setups, membership registration, etc.


The star symbol shows that you can use your voice to enter search terms. This is called “Voice input” function.

“Return to Home”

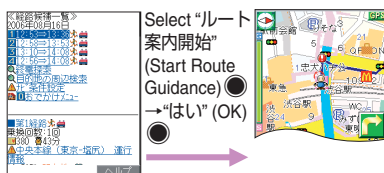

Simply preset the location of your home for easy navigation back there from any other location.

“My Spot”



Just register destinations you often visit, your home location, and your favorite destinations for quick and simple navigation when you need it.

“View My Position”



Your initial location is indicated by ★. Changes in your location are indicated in real time by 人.

Map screen

Simply select View My Position to display your current location on a map in real time.

“Mail My Position”



You can e-mail a map of your current location to another phone.

Navigation engine by NAVITIME JAPAN 地図:昭文社/住友電工

Info

- ◎ In addition to packet communication fee, you may be charged some other fees for using EZ Navi.
- ◎ The display layout and contents are examples. These are subject to change.

Security Navi Features

EZweb subscription required

Position Search Features

When your child does not come home early and you are worried if your child may be lost, you can check the current location of your child by a map with a simple operation. There are two kinds of services of “Position Search”: “Auto Position Search” and “Position Search Mail”.

1

“いつでも位置確認” (Auto Position Search)



Example: When the mother sent a mail to her child:

Features

- When the mother searches where her child is, she can be notified where her child is, although her child does not make any operation. This service is recommended to little children who are not accustomed to cellphone operations.

Notice: The monthly fee is charged separately.

2

“位置確認メール” (Position Search Mail)



Example: When the mother sent a mail to her child:

Features

- The mother can send a mail with a message to her child.
- The child can check the message from his/her mother and inform her where he/she is.

Area Message Features

This service lets you configure two au phones with specific areas and specific times. Whenever a child carrying one of the phones approaches (or is inside of) the specified area during the specified a time period, an e-mail alert is sent to the other phone. Area Message can also be configured so an e-mail alert is sent when the child leaves (or is outside of) a specified area.

“エリア通知” (Area Message)



Example: When the mother checks the area her child is in:

Features

When your child goes to Juku (cram school) or culture lesson and you are worried about of your child's way home, the child's cellphone automatically informs the mother's cellphone that the child has passed the usual route.

Info

- ◎ Security Navi services are available only among the cellphones supporting these feature.
- ◎ Before you can use Security Navi, the phone numbers of the cell phones must be recorded in the address books of both of the cell phones.
- ◎ Before you can use Security Navi, you need to agree to be bound by the terms of the user agreement that appears the first time you start it up and you must register a password. Agreement to be bound by the user agreement is required in order to use Security Navi.
- ◎ The wrong location may be displayed in areas where GPS reception is poor, underground, inside of a building, or in areas surrounded by buildings.
- ◎ Area Message may not be able to send alerts properly in cases where correct location information cannot be obtained.
- ◎ When the other party is out of range, set to “reject,” no application, operating, or using a cellphone not supporting this service, you cannot check the location.
- ◎ The screen is an example, and may differ from the actual display.
- ◎ Security Navi features cannot be used while C-mail is disabled or when EZ apps Restrict is selected.
- ◎ Free calling time provided by your service plans can be applied to EZ Navi transmission charges. However, Family C-mail Service or Packet Communication Discount Service does not apply to EZ Navi transmission charges.
- ◎ The packet communication fee is charged for obtaining information or displaying map separately.

PC site viewer Features

EZweb subscription required

1

You can view WEB sites for PC with G'zOne W42CA

A WEB site for PC



Viewing a site with PC site viewer



Info

The content displayed is an example, and it may differ from the contents that actually appear on the display of your phone.

If you set the “表示モード” (Display Mode) to “スモールスクリーン” (Small Screen), a WEB site is displayed adjusted to the size of G'zOne W42CA screen, and you can view the site with simple operations.

If you set the “表示モード” (Display Mode) to “PCスクリーン” (PC Screen), the portion of the page laid out by PC screen is displayed, and you can view the site with operations.

2

You can display/automatically-update a portion of WEB site information. “Using Standby Assignment” (page 80)

Registering to “待受指定” (Standby Assignment)



Displaying as “Standby screen”



Select a portion of a WEB site page beforehand, and then register it to “待受指定” (Standby Assignment).


Display a portion of a WEB site page, and you can automatically-update it at specified intervals.

Info


If you press (接続) (Connect) while “待受指定” (Standby Assignment) is displayed, you can display from the top of the page with a full-screen and operate the PC site viewer in the same way as the usual browsing.

PC site viewer




To use the PC site viewer, an EZ WIN course subscription is required. If you did not subscribe when you purchased your cellphone, contact your nearest au shop or the au Customer Service Center. Using the PC site viewer, you can comfortably view the WEB sites just like those you usually view with your PC, by high speed packet communication of 2.4 Mbps down at maximum.




Mastering Operation Basics


- While the standby screen is displayed, press .



- Use  to select "PC SITE VIEWER," press  (OK), and then press  (OK).



Warning message on packet communication appears.

- Press  (トップページ) (Top Page).



The initial setting is "Duogate" (<http://duogate.jp/>).

※ The contents displayed on the right is an example, and it may differ from the contents that actually appear on the display of your phone.

- Press .



The display scrolls.

Use  to select the links on the screen.

If you select a link and press  (選択) (Select), the linked page appears.


Using Standby Assignment

You can set a portion of a WEB site as the standby screen. You can set it to be automatically-updated at specified intervals.


When a specified time elapses on the standby screen, the WEB site selected by “待受指定” (Standby Assignment) is displayed.

To use “待受指定” (Standby Assignment), perform steps 1 through 4 under “Mastering Operation Basics” (page 79), and then perform the following steps.





- 1 Display your favorite page, and then press  (メニュー) (Menu).




- 2 Press  (待受指定) (Standby Assignment).






- 3 Press  (オプション) (Option), and then press  (新規作成) (Create New).



- 4 Press  (OK) twice.

If you press , you can shrink the area displayed by “待受指定” (Standby Assignment).

If you press  (拡大) (Widen) and press , you can enlarge the display area.



※ If you press  (縮小) (Narrow) again, you can shrink the display area.



5 Press **OK** (編集) (Edit), enter the title, and then press **OK** (OK).



6 Press **Register** (登録) (Register), and then press **Setting** (設定) (Setting).



7 Use **Up/Down** to select the interval to update the standby screen.



If you select the interval to automatically-update the page displayed as the standby screen from among “24時間/12時間/8時間/4時間/2時間/1時間/30分/更新しない” (24 hours/12 hours/8 hours/4 hours/2 hours/1 hour/30 minutes/no update), and press **OK** (OK), then “待受指定警告表示” (Standby Assignment Warning Display) appears.

Press **OK** (OK), and then press **OK** (OK) to complete the setting.

CAUTION

◎ Precautions for using packet communication for PC site viewer
We recommend that you subscribe to Packet Communication Discount Service as the communication fee may be quite high by performing a large-size communication such as viewing homepages that include large images.

Also, be careful that packet communication fee will be charged for each updating if you set automatic-update by “待受指定” (Standby Assignment).

◎ Checking your packet communication fee

You can use Charge Reference Service (This service estimates this month's packet communication fee with no discount. It shows the rough number that was billed 1 or 2 days ago.).

PC ⇒ <http://my.kddi.com/> (MyKDDI)

※ Subscription is required before you can start using this service.

au phone ⇒ **Menu** → “Top Menu” → “料金・申込・インフォ” (Charges, Applications, and Info)


Smart Mode

Smart Mode lets you limit operations to the telephone function, address book, camera, e-mail, C-mail, EZweb, and other frequently used functions, which simplifies operations.




Entering Smart Mode

- 1 While the standby screen is displayed, press , use to select "SETTINGS," and then press (OK).



- 2 Press (User Support), (OperationSupport), and then (Mode Setup).




- 3 Press (Smart Mode).






Info



- ◎ The lock number is required when changing from Teens Mode to Smart Mode.
- ◎ When you enter Smart Mode, settings configured in Usual Mode are automatically changed to those configured in Smart Mode.

Exiting Smart Mode


1 While the standby screen is displayed, press .




2 Use  to select “SETTINGS,” and then press  (Select).




3 Press  (SmartModeOFF).




4 Press  (Yes).
This returns to Usual Mode.



Using the Smart Mode Main Menu

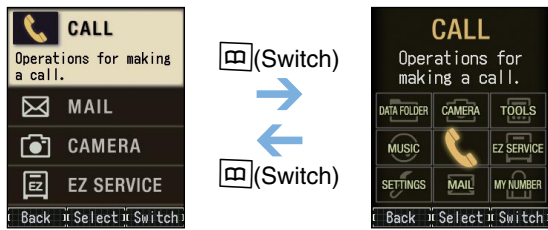


Smart Mode has its own main menu. You can switch between the two available Smart Mode main menu styles by pressing  (Switch).





Menu	Description
CALL	For using the address book, outgoing records and incoming records, and for registering data in the address book
MAIL	For composing and reading E-mail and C-mail messages, and for changing E-mail addresses
CAMERA	For selecting the photo or movie recording, and the correction method
EZ SERVICE	For using EZ services
MUSIC	For using au Music Player and SD-Audio Player
DATA FOLDER	For viewing and deleting data in the Data Folder or microSD™ memory card
TOOLS	For using the calendar, electronic compass, calculator, and other tools
SETTINGS	For changing the incoming tone, wallpaper, and character size, for turning Manner Mode on and off, and for turning Smart Mode off
MY NUMBER	For displaying your current phone number and e-mail address

Adding Data to the Address Book in Smart Mode






- While the standby screen is displayed, press , press , and then press .





- Enter the name, and then press .


To input text
→ “Inputting Characters” (page 34)




- Check the reading of the name you inputted, press , and then press .

You can also select data in incoming records or outgoing records.
To go without saving the telephone number, press  (Not Input) and perform step 5.



- Enter the phone number, and then press .


When entering the number of a standard phone, be sure to start with the area code.



5 Press **3 DEF** (Input by Myself).


You can also select data in sending records or receiving records.

To go without saving E-mail address, press **4 DEL** (Not Input) and perform step 7.




6 Enter the e-mail address, and then press **OK**.

To input an e-mail address
→ “Inputting an E-mail Address”
(page 35)



7 Press **2 か ABC** (Not Register).

The confirmation screen appears.
Press **OK** (OK).



8 Press **OK** (Reg.).





Info


- In Smart Mode, you can only input “Name,” “Reading,” “Phone Number1,” “E-Mail Add1,” and “Image” data into an address book record.
- You can press **1 あ** (Register) in step 7 to select a photo in the Data Folder and assign it to the address book record.
- Pressing **あ** (Reedit) in step 8, and then pressing **1 あ** (Change) returns to step 2 from which you can edit the contents of the record.



Using the Address Book in Smart Mode





Example: To view a record in address book





- While the standby screen is displayed, press , and then press  (Look).









- Use  to select the address book record you want to view, and then press  (Select).




- Press  (Read Data).

The address book record appears. Use  to select the phone number, and then press  (Call). To send an e-mail message, use  to select the e-mail address, and then press  (E-Mail). This will display the e-mail composition screen.




-  (Call): Dials the number of the selected record.
-  (Send Mail): Selects to compose an e-mail message and send it to the address of the selected record.
To create an e-mail message
→ Perform the procedure starting from step 7 under “Creating and Sending E-mail Messages in Smart Mode” (page 88).
-  (Delete Data): Deletes the selected address book record.
-  (Edit Data): Selects to edit the selected address book record.
-  (Send via Ir): Sends the selected address book record via infrared.

Creating and Sending E-mail Messages in Smart Mode




- 1 While the standby screen is displayed, press .



- 2 Press (E-Mail).






- 3 Press (Create Mail).




- 4 Press (Address Book).

You can select an addresses from sending/receiving records, or you can manually enter an address.





- 5** Use  to select an addressee, and then press  (Select).





- 6** Press  (Select).

When you have already registered two or more e-mail addresses in the address book (in Usual Mode/Teens Mode), Setting to Smart Mode displays only the e-mail address you usually use.





- 7** Press  (Fix).





- 8** Enter the subject, and then press  (OK).

To input text
→ “Inputting Characters” (page 34)




- 9** Press  (Fix).



10 Enter the body text, and then press (OK).

To input text

→ “Inputting Characters” (page 34)



11 Press (Not Attach).

The confirmation screen appears.

Press  (OK).


 (Data Folder):

You can select a photo saved in the Data Folder and attach it to the e-mail message.

 (microSD):

You can select a photo saved in the microSD™ memory card and attach it to the e-mail message.


In Smart Mode, an e-mail message can have only one attachment.



12 After checking the content of the e-mail, press (Send).

“フォトメール便送信” (Photo Mail), “マイ絵文字送信” (My Pictograph), “お手軽絵文字送信” (Easy Pictograph) are the auto address converter (a part of the e-mail address will be converted automatically).

To use “お手軽絵文字送信” (Easy Pictograph) (free) or “マイ絵文字送信” (My Pictograph) (paid) services, you need to subscribe to the EZweb contents, “絵文字め〜る” (Pictographs Mail).



13 Press (Send).



Info

Pressing  (Reedit) instead of  (Send) in step 12 returns to step 4, from which you can edit the contents of the e-mail message.

Shooting a Photo in Smart Mode




- While the standby screen is displayed, press **OK**, use **Up** to select “CAMERA,” and then press **OK** (Select).




- Press **1** (Photo), and then press **1** (Photo1).

Photo 1	Wallpaper 240×320
Photo 2	VGA 640×480



- Point the lens at the subject, and then press **OK** (Shutter).

The phone will emit a shutter sound.
You can also press **Shutter** in place of **OK**.



- Press **Save** (Save).



Info




Pressing **Menu** in step 4, and then pressing **2** (Send Mail) will display a screen for composing an e-mail message with attached photo.


To create an e-mail message


→ Perform the procedure starting from step 4 under “Creating and Sending E-mail Messages in Smart Mode” (page 88).

Viewing Photos in Smart Mode





- 1 While the standby screen is displayed, press , use  to select "DATA FOLDER," and then press  (Select).






- 2 Press  (Data Folder).



- 3 Use  to select "Photo Folder," and then press  (Select).



Selecting "All Data" displays a list of all photos in the Photo Folder.




- 4 Use  to select the dated (by shooting date) folder, and then press  (Select).

A list of all photos that were shot on that day are displayed.





5 Use  to select the photo you want to view, and then press  (Menu).



6 Press  (Play).

The photo appears.



 (Delete): Deletes data.


 (Attach E-Mail):

Displays a screen for composing an e-mail message with an attachment.

To create an e-mail message

→ Perform the procedure starting from step 4 under “Creating and Sending E-mail Messages in Smart Mode” (page 88).

 (MoveTo microSD): Moves the data to microSD™ memory card.

 (Send via Ir): Sends your data via infrared.

Teens Mode

Teens Mode can be used to block spam, and to block inadvertent access to phone numbers and URLs included inside mail messages. Teens Mode can also be used to restrict call time and the number of mail (sent).



Using Teens Mode

■ **Teens Mode can be used to restrict mail reception and display contents.**

When the sender is a Pair partner	Receipt is allowed.
When the sender is included in the address book	Receipt is allowed. However, the phone numbers, e-mail addresses or URLs contained in the body of the mail message can not be used.
When the sender is not either of the above	E-mail: Only the sender's name and subject are received. Body text and attached data are not received. C-mail: Not received.

■ **Turning on “Teens Restrict (M43✳)” and Teens Mode makes it possible to restrict call time and the number of mail (sent).**




● Making a Call


To someone who is a Pair partner	No restriction
To someone who is not a Pair partner	Call time is restricted. Further calling is not possible if the call time exceeds the “Teens Restrict (M43✳)” setting.

● Sending a Mail


To someone who is a Pair partner	No restriction
To someone who is not a Pair partner	The number of sendings is restricted. Further mailing is not possible if the number of sendings exceeds the “Teens Restrict (M43✳)” setting.



Turning on Teens Mode


- 1 While the standby screen is displayed, press , use  to select "SETTINGS," and then press  (OK).




- 2 Press  (User Support), and then  (OperationSupport).



- 3 Press  (Mode Setup), and then  (Teens Mode).



- 4 Enter the lock number, and then press  (OK).



Info

The lock number is required when changing from Teens Mode to Usual Mode or Smart Mode.

Other Functions

Hot Key Features

When you have Hot Key turned on, holding down **0** (わ 記号) for about one second while the standby screen is displayed will dial a preset phone number or sound the Hot Buzzer.

Hot Dial

With Hot Dial, holding down **0** (わ 記号) for about one second will dial a preset phone number.

■ To turn on Hot Dial

While the standby screen is displayed, press **5** (な JKL) / **3** (さ OBP) / **5** (な JKL) / **1** (あ . 号), input the lock number, and then press **●** (OK).

Next, input the phone number you want to preset, and then press **●** (Reg).

Hot Buzzer

With Hot Buzzer, holding down **0** (わ 記号) for about one second will sound a loud-volume buzzer.



■ To turn on Hot Buzzer

While the standby screen is displayed, press

● **5** (な JKL) / **3** (さ OBP) / **5** (な JKL) / **2** (か 0BC), input the lock number, and then press **●** (OK).

■ To stop the Hot Buzzer

To stop the Hot Buzzer after it starts to sound, input the lock number, and then press **●** (OK).

※ You cannot turn off the phone or perform any other operation while the Hot Buzzer is sounding. The Hot Buzzer will continue to sound until you input the lock number or the battery fully discharges.

Info

The Hot Buzzer sounds from the speaker of G'zOne W42CA even when you have Casio flat-type stereo earphones 03 (option)/flat-type switched earphone microphone (option)/flat-type stereo earphone-microphone (option) attached to your G'zOne W42CA.


Extension Mode

Using the extension mode, G'zOne W42CA automatically shuts down the radio wave after issuing the Low Battery Alert. This is quite a useful function that you can still check Outgoing/Incoming Records, Content of e-mail, Address Book, Schedule and so on when necessary. In this case, you can only use the functions which needs no radio wave.

■ To turn on Extension Mode

While the standby screen is displayed, press     .

Display example when you switch to Extension Mode



In addition to the functions covered in this Basic Manual, your G'zOne W42CA also has the following features.

Global Expert

G'zOne W42CA supports Global Expert based on au IC card. Global Expert is an international roaming service for the customers to use the phone replacing its au IC card with GSM cellphone for overseas use. No special application procedure or daily/monthly fee are needed, and the call charge is added up to domestic call, so the pay procedure is simple.

au Music

You can use au Music Player to enjoy a Chaku-Uta Full® or your favorite CD tracks. Also, you can download a Chaku-Uta Full® or purchase CD tracks by accessing our site ("EZ Music!" or "au Records").

Electronic Compass

A built-in digital compass can be used to display direction and angle.

Clock

The clock has such functions as alarm, countdown timer, and stopwatch.

Barcode Reader & Maker

You can use the camera to read QR codes and barcodes. Also, you can create your own barcodes directly from your address book entries.


Infrared communication

You can exchange the data saved in your address book, Schedule, or Data Folder between au cellphones supporting infrared communication.

EZ apps (BREW®)

Enjoy downloaded games and other software.

Macro Mode (Photo and Movie)

Pressing  allows you to take close-up photos of food, flowers, and other subjects (closest focusing distance: 10 cm).

Serial Shot (Photo)

You can shoot up to nine consecutive images and store all of them or only selected images in memory.

















Post Recording/ Telop (Movie)

After recording a movie, you can add audio or text. You can select from among 24 colors for the text and 169 colors for the background.

Mail Recipe (E-mail)

Simply follow the steps provided for quick and easy composing of Basic Mail without attachments, Photo Mail, Doodle Mail, Movie Mail, and Exciting Mail.

Troubleshooting

Symptom	What to check	What to do	Page
The phone does not turn on. 	Is the battery pack installed correctly ?	Correctly install the battery pack.	—
	Is the battery pack charged ?	Charge the battery pack.	P.12
	Are you holding down  for at least 1.5 seconds ?	Hold down  for at least 1.5 seconds to turn on the phone.	P.14
I can't make calls. 	Is  (Out of Range) on the display ?	Wait until you are in a location where  is not displayed before trying to make a call.	P.14
	Are you including the area code?	When making a call to a standard phone, you need to input the area code, and then the phone number.	P.26
	Is the phone turned on?	Hold down  for at least 1.5 seconds to turn on the phone.	P.14
	Did you press  ?	After inputting the phone number, press  to dial it.	P.26
	Is Emission OFF Mode turned on?	Turn off Emission OFF Mode.	—
I can't receive calls.	Is  (Out of Range) on the display?	Move to a location where  is not on the display.	P.14
	Is the phone turned on?	Hold down  for at least 1.5 seconds to turn on the phone.	P.14
	Is Emission OFF Mode turned on?	Turn off Emission OFF Mode.	—
Nothing happens when I press the keys.	Is the phone turned on?	Hold down  for at least 1.5 seconds to turn on the phone.	P.14
The phone emits a warning tone, and then turns off.	Is battery pack power low?	Charge the battery pack.	P.12
The phone answers calls automatically.	Is Easy Voice Memo turned on?	Hold down  for about one second to turn off Easy Voice Memo.	P.32
	Is Drive Mode turned on?	Hold down  for about one second to turn off Drive Mode.	P.4
I can't hear the caller.	Is the earpiece volume level too low?	During a call, press  to increase earpiece volume.	P.31

If you lose your G'zOne W42CA


Turning on Remote Auto Lock makes it possible for you to set Auto Lock on from a remote location. These lock function keeps others from using your G'zOne W42CA.




■ Configuring Remote Auto Lock Settings

You can set Auto Lock on by making calls several times from the registered phone number to your G'zOne W42CA within the specified period of time.



- While the standby screen is displayed, press 4 た GHI 1 あ . @ 4 た GHI, input the lock number, and then press (OK).



- Press (6 mnc) (Caller ID List).



- Use to select a registration number, press (Edit), input the phone number, and then press (Reg).




Press twice and advance to the next step.



You can also press (Menu) before inputting a phone number, and select the number from the address book, outgoing records, or incoming records, or you can specify a pay phone.

You can register up to three different phone numbers.

4 Press **1** (ON/OFF Setup), and then press **1** (ON).




5 Press **2** (Specified Time), input the period you want to specify, and then press **OK** (OK).



You can set the time period (the time intervals from the first call to the last call you should make to activate Remote Auto Lock).

You can set the time period between 1 to 10 minutes.

6 Press **3** (Num of Incoming), input the number of calls you want to specify, and then press **OK** (OK).



You can set how many times you should repeat making a call to activate Remote Auto Lock.

You can set it from 3 to 10 calls.

Setting Auto Lock on

1 Make a call to your G'zOne W42CA from the registered phone number within the period of time which has been specified in "Configuring Remote Auto Lock Settings" (page 100).

After repeating a call (3 to 10 calls you have specified), Remote Auto Lock turns active, and you hear an announcement letting you know Auto Lock has been set.

After Remote Auto Lock turns active, your G'zOne W42CA is automatically turned off, and turned on again.

CAUTION

- Remote Auto Lock cannot be activated while your G'zOne W42CA is turned off or outside of the service area.
- When you purchase the G'zOne W42CA, its initial default "Erase Data" setting is "Not Erase," and its initial default "Rel Phone Lock" setting is "Valid."

Index

A

Address Book	38
Adding outgoing or incoming record data to the address book	41
Dialing from the address book	42
Editing	40
Registering an address book	38
Adjusting the earpiece volume during a call	31
Adjusting the ring tone volume	30

B

Battery level	14
Battery pack	10, 11

C

Camera	59
Recording a movie	62
Shooting a photo	61
Viewing photos and movies	64
Chaku-Uta® Downloading	70
Chaku-Uta-Full® Downloading	71
Changing the ring tone	28
Charging the battery pack	12
Checking charges	72
C-mail	46
C-mail safe block function	46
Create New	53
Creating and sending C-mail messages ...	53
Reading received C-mail messages ...	54

D

Desktop holder	10, 12
Disaster Message Board Service	6
Display indicators	19
Display language	16
Domain name	24
Drive Mode	4

E

Earpiece volume	31
Easy Voice Memo Delete	33
Playback	33
Turning on	32
E-mail	45
Create New	47
Creating and sending e-mail messages ...	47
E-mail address	22, 23, 24
E-Mail Setup	52

Initial settings	22
Reading an e-mail message with an attached photo or movie	50
Reading received e-mail messages ...	49
Replying to a received e-mail message ...	51
Subject	48
To	47
Extension Mode	97
EZ Channel	73
EZ Navi	74
EZweb	66
Bookmarking sites	68
Downloading	70, 71
EZ Password	70
EZ top menu	67
Viewing a bookmarked site	69

H

Hello Messenger	55
Invite the members to the meeting ...	57
When you get an invitation message to join	58
Hot key	96
Hot Buzzer	96
Hot Dial	96

I

Included items	10
Incoming records	27
Initial settings E-mail and EZweb	22
Initial values	14
Inputting characters	34
Inputting an e-mail address	35
Inputting pictographs	36
Inputting useful sentences	36

K

Key functions	18
----------------------------	-----------

M

Mail C-mail	46
E-mail	45
Mail filter	5, 52
Main menu	20, 84
Manner Mode Turning on	31
Vibrator	31
microSD™ memory card	11, 19
Mind your manners!	1

Movie

Movie Folder	64
Recording a movie	62
Rerecording a movie	63
Sending a movie by e-mail	65
Viewing movies	64

N

Names of parts	11
Notify caller ID	26

O

One-ring calls	5, 27
Operation basics	18
Other functions	96
Outgoing records	27
Own e-mail address	
Changing	24
Viewing	23

P

Pair Function	43
Making a phone call, sending mail, invite a pair partner to a Hello Messenger meeting	44
Registering a Pair partner	43
PC site viewer	78
Mastering Operation Basics	79
Using Standby Assignment	80
Personal identification numbers and passwords	15
Phone Call	26
Answering a call	26
Dialing a person who called you (incoming records)	27
Making a call	26
Missed call notification	26
Redialing a person you called (outgoing records)	27
Photo	
Photo Folder	64
Reshooting a photo	63
Sending a photo by e-mail	65
Shooting a photo	61
Viewing photos	64
Playback	
Easy Voice Memo	33
Movie	64
Photo	64

R

Ready	10
Redial	
From incoming records	27
From outgoing records	27
Remote Auto Lock	100

S

Security Navi	76
Signal strength	14
Site	67, 68, 69
Smart Mode	82
Adding data to the address book	85
Creating and sending e-mail messages	88
Entering Smart Mode	82
Exiting Smart Mode	83
Shooting a photo	91
Using the address book	87
Using the Main Menu	84
Viewing shot photos	92
Soft keys	21
Spam	5, 52
Standby screen	14

T

Teens Mode	94
Troubleshooting	99
Turning on power	14
Turning off power	14

U

Unsolicited advertisements	5, 52
Using Menus	21
Using Photo Mail	65

V

Viewing your phone number	23
----------------------------------------	----

For inquiries, call:
au Customer Service Center (General Information)

From EZweb site:

How to access  **55756** or

**EZ→Top Menu→料金・申込・インフォ (Charges,
Applications, Info)→お問い合わせ (Inquiries)**

※ Menu structure is subject to change without notice.

From regular phones:

 **0077-7-111**
フリーコール
(toll free)

From au cellphones:

157 area code not required
(toll free)

Pressing "zero" will connect you to an operator,
after calling "157" on your au cellphone.


Sales: KDDI Corporation
Okinawa Cellular Telephone Company
Manufactured by CASIO COMPUTER CO., LTD.

R100

古紙パルプ配合率100%再生紙を使用



モバイル・リサイクル・ネットワーク
携帯電話・PHSのリサイクルにご協力を。

Cellphone and PHS operators collect and recycle unused telephones,
batteries and battery chargers at stores bearing the  logo regardless
of brand and manufacturer to protect the environment and reuse
valuable resources.

Read this to access to the
au online manual



MN6200YAA-1
June 2006, 1st Edition